

# Transportation Services - York Region

---

## Standard Operating Procedures (SOP's) for Traffic Noise Mitigation on Regional Roads

---

**November 2019**

**Prepared in consultation with the Consulting Engineering Firm  
“SS Wilson Associates, Richmond Hill, ON”**

## Table of Contents

<b>PURPOSE OF THESE STANDARD OPERATING PROCEDURES (SOP'S) .....</b>	<b>4</b>
<b>DEFINITIONS .....</b>	<b>4</b>
<b>SCENARIO A – CAPITAL PROGRAM PROJECTS .....</b>	<b>10</b>
<b>Purpose.....</b>	<b>10</b>
<b>Establishment of the Sound Levels .....</b>	<b>10</b>
<b>Road and Traffic Data.....</b>	<b>10</b>
<b>Road Traffic Sound Level Predictions .....</b>	<b>11</b>
<b>Bus Transit Corridor Sound Level Predictions .....</b>	<b>12</b>
<b>Ambient Sound Levels Due to Other Sources of Noise .....</b>	<b>12</b>
<b>Impact on Future Developments .....</b>	<b>12</b>
<b>Weekend Traffic or Summer Traffic .....</b>	<b>12</b>
<b>Operational Statements from Council (TWC Report No. 3 – March 23, 2006) .....</b>	<b>13</b>
<b>Scenario Guidelines .....</b>	<b>13</b>
<b>SCENARIO B – RETROFIT APPLICATIONS .....</b>	<b>14</b>
<b>Purpose.....</b>	<b>14</b>
<b>Requests for Retrofitting.....</b>	<b>14</b>
<b>Candidate Sites .....</b>	<b>14</b>
<b>Exclusions &amp; Limitations of the Policy .....</b>	<b>14</b>
<b>Noise Sensitive Points of Reception.....</b>	<b>15</b>
<b>Sound Level Criteria .....</b>	<b>15</b>
<b>Noise Barrier Technical Criteria .....</b>	<b>16</b>
<b>Construction and Maintenance .....</b>	<b>16</b>
<b>Costs and Priority .....</b>	<b>17</b>
<b>York Region Staff Responsibilities .....</b>	<b>17</b>
<b>SCENARIO C – DEVELOPMENT PLANNING APPLICATIONS .....</b>	<b>20</b>
<b>Purpose.....</b>	<b>20</b>
<b>Noise Assessment Criteria .....</b>	<b>20</b>
<b>Noise Impact Assessment .....</b>	<b>20</b>
<b>Prediction of Road Traffic Noise .....</b>	<b>21</b>
<b>Application of Criteria .....</b>	<b>21</b>
<b>Assessment Locations .....</b>	<b>22</b>

<b>SCENARIO D – REPLACEMENT APPLICATIONS .....</b>	<b>23</b>
Purpose.....	23
Noise Wall Safety Criteria .....	23
<b>MATERIAL STANDARDS &amp; CONSTRUCTION SPECIFICATIONS .....</b>	<b>23</b>

- - -

### **STANDARD OPERATION PROCEDURES SUPPLEMENT DOCUMENT:**

Scenario Guidelines – Noise Sensitive Uses .....	34
Scenario Guidelines – Land Compatibility .....	35
Scenario Guidelines – Community Integration .....	38

- - -

### **YORK REGION – STANDARD WOODEN NOISE BARRIER DRAWINGS:**

Cover Sheet .....	41
Index Sheet .....	42
Sheet “A” – Standard Noise Barrier Location .....	43
Sheet “B 1” – Elevation View: Flat Grade Installation .....	44
Sheet “B 2” – Elevation View: Sloping Grade Installation .....	45
Sheet “C” – Post & Base Construction Detail .....	46
Sheet “D” – Post, Rail, Coping & Construction Fastening Detail .....	47
Sheet “E” – Post & Post Capping Detail .....	48
Sheet “F” – Exploded View – Board on Board Fastening Detail .....	49
Sheet “G” – Material & Finishing Detail .....	50
Sheet “H” – Aesthetic Enhancements .....	51

## PURPOSE OF THESE STANDARD OPERATING PROCEDURES (SOP'S)

The purpose of these SOP's is to ensure that fundamental design and calculation criteria is identified in order to meet York Region standards for traffic noise control on Regional roads and bus transit corridors for the following scenarios:

- Scenario A – Capital Program Projects
- Scenario B – Retrofit Applications
- Scenario C – Development Planning
- Scenario D – Replacement Applications

Staff, developers and consultants that incorporate these criteria will ensure that:

- Environmental Assessment Act requirements have been met
- York Region's Traffic Noise Mitigation Policy for regional roads have been met
- Ministry of Environment protocol, guidelines and design criteria have been met
- York Region Official Plan objectives have been met
- York Region transportation planning and design practices have been met
- Local Municipality requirements have been met

Each scenario has been individually identified in order to capture the key elements that need to be examined and incorporated into the noise study so that the appropriate noise mitigation is ensured.

Staff, developers and consultants shall familiarize themselves with the applicable sections when preparing noise study reports and mitigation options.

## DEFINITIONS

**A weighted decibel; dBA** A nationally and internationally standardized frequency weighting applied to the sound level (measured in decibels) spectrum to approximate the sensitivity of the human hearing mechanism as a function of frequency (pitch).

**AADT** "Annual Average Daily Traffic" is defined as the average twenty-four hour, two-way traffic for the period January 1st to December 31st.

**Adverse effect** means one or more of the following effects of sound and vibration, selected from the relevant definitions in the Environmental Protection Act:

- impairment of the quality of the natural environment for any use that can be made of it;
- cause harm or material discomfort to any person;
- create an adverse effect on the health of any person
- loss of enjoyment of normal use of property.
- Interfere with the normal conduct of business
- Rendering any property unfit for use by man

**Ambient sound level** means background sound level.

**Acoustic "Shadow Zone" (and Acoustic "Bright Zone")** Acoustic "Shadow Zone" is the area behind a sound barrier with no direct line-of-sight from the receptor to the source where the sound wave may diffract (bend) around the barrier. The Acoustic "Bright Zone" is the area around a sound barrier with direct line-of-sight from the receptor to the source.

**Acoustic Insulation Factor (AIF)** is a technical descriptor developed by the National Research Council of Canada (NRC) to signify the ability of a structure or an assembly to reduce the noise from the outside to the inside of a building based on specified indoor design conditions.

**Acoustical Consultant** is a Professional Engineer (P.Eng.), licensed by the Professional Engineers of Ontario (PEO) to practice in the Province of Ontario, and with demonstrated experience in the field of acoustics and noise control as partly defined by the PEO professional practice Guidelines for Professional Engineers Providing Acoustical Engineering Services in Land-Use Planning.

**Aesthetics** in the context of this guideline document, refer to the methods of providing visual relief and appealing characteristics to planned *noise barriers* through the application of landscaping designs and aesthetic treatment.

**Airborne Sound** is sound that reaches the point of interest by propagation through air.

**Ambient/ Background Sound Level** in general, it is the all-encompassing noise associated with a given environment and comprises a composite of sounds from many sources near and far. In the context of roadway environmental noise assessment, the ambient or existing noise level is the noise level which exists at a receptor as a result of existing traffic conditions without the addition of noise generated by the proposed undertaking or the new source of noise. Highly intrusive short duration noise caused by a source such as an aircraft flyover or a train pass-by is excluded from the determination of the background sound level.

**A-Weighted sound level** The “A-weighted sound level” is a *sound pressure level* indicated by a measurement system that includes an *A-weighted* network. The resulting value is in *decibels* and commonly labeled *dBA*.

**A-Weighting** is a frequency weighting intended to approximate the relative sensitivity of the normal human ear to different frequencies (pitches of sound). The specific variation of sensitivity with frequency to conform to IEC Publication 651.

**dBA** means the A-weighted sound pressure level.

**Decibel** is the common measure of sound level or sound pressure level. It is the term to identify 10 times the common logarithm of the ratio of two like quantities proportional to power or energy. The “decibel” is a dimensionless measure of sound level or sound pressure level; see sound pressure level.

**Engineer or Consulting Engineer (Structural)** For the purpose of this document, in connection with the design of Noise/Sound Barriers, shall mean the Professional Engineer or the Engineering firm licensed by the Professional Engineers of Ontario (PEO) to practice structural engineering which is engaged by the Supplier and/or project proponent to design and certify the noise barrier system. The Engineer shall have documented experience in the design, construction and review of Structural Engineering Projects as required and in accordance with the Guidelines for Professional Engineering Services prepared by the Professional Engineers of Ontario.

**Environmental Noise** is noise transmitted through the outdoor environment as opposed to noise generated and contained within buildings.

**First Row Receiver** is a term used to define all those receivers (or receptors) adjacent to a Region of York transportation corridor where sound level differences are imperceptible (within 3 dBA) from the noisiest receiver.

**Frequency (Pitch)** is the number of complete oscillations (or cycles) per second of a periodically varying quantity (e.g. pressure, displacement). The unit is the Hertz (Hz).

**Geotechnical Engineer** is a Professional Engineer (P. Eng.) licensed by the Professional Engineers of Ontario (PEO) to practice in the Province of Ontario, with demonstrated expertise in the field of geotechnical engineering as defined by the PEO Guidelines for Professional Engineers Providing Geotechnical Engineering Services.

**Indoor sound level** is an estimated/calculated sound level in the central part of a room.

**Leq – The Energy Equivalent Continuous Sound Level** is the constant sound level over the time period in question, that results in the same total sound energy as the actually varying sound. It must be associated with a time period. Leq is a measure of total sound energy dose over a specified time period.

**Leq (T): Leq (16 hours), Leq (8 hours) or Leq (1 hours)** means the A-weighted level of a steady sound carrying the same total energy in the time period T as the observed fluctuating sound. The time period T is given in brackets.

**Mature State of Development** is the future build-out of development to the ultimate population and traffic capacity forecasts corresponding to the Official Plan of the Region.

**Noise** is defined as any unwanted sound.

**Noise Attenuation Features** is any feature or combination of features such as noise abatement walls, earth berms, building configuration and building materials (not intended to be a complete list) which provide a reduction in noise level for noise sensitive outdoor living areas.

**Noise Barrier** is a physical structure planned or otherwise, which is located between a noise source and a noise sensitive receptor and effects a reduction in sound level transmission from the source to the receptor. Noise barriers, in general, include walls, berms or combinations thereof, buildings and natural or deliberately created land features.

**Noise Reduction (NR)** is the difference in sound level between two adjacent spaces.

**Noise Reduction Coefficient (NRC)** is a single-number rating of the sound-absorptive property of a material. It is calculated as the average of the sound-absorption coefficients, measured in accordance with ASTM Test Method C423, at 250, 500, 1000 and 2000 Hz, and rounded to the nearest multiple of 0.05.

**Noise Control measure** refers to action which can be taken to reduce the sound levels inside and/or outside the buildings of concern and achieve compatibility for the specific land use or activity. Control measures may include, but are not limited to, the following:

- **Site Planning** - orientation of buildings and Outdoor Living Areas with respect to noise sources, spatial separation such as the insertion of noise insensitive land uses between source and receiver, appropriate setbacks, the use of intervening service roads and site planning techniques;
- **Acoustical Barriers** - berms, walls or a combination thereof, favorable topographical features, other intervening structures;
- **Architectural Design** - room and corridor arrangement, blank walls, placement of windows, balconies, courtyards and building height;

- **Building Construction** - acoustical treatment of walls, ceilings, selection of acoustical materials and other control devices;
- **Mitigation at Source** - noise control applied directly to the noise source;
- **Windows/Doors** - acoustically selected windows or doors that provide the required noise reduction.
- **Central Air Conditioning** - in order to allow for the windows and doors to remain closed, central air conditioning (mechanical ventilation and climatic control system) is necessary. Provision for future installation of air conditioning may also be necessary in lower noise level cases.
- **Capital Projects** - where capital road construction projects are being undertaken on regional roads.
- **Development** - development or redevelopment affected by regional roads.
- **Retrofit** - existing residential areas that may warrant noise mitigation due to regional roads and/or bus transit corridors where no Capital Road Projects are being undertaken.

**Noise Sensitive Areas (NSA)/Land Use:** These are any outdoor living areas associated with noise-sensitive buildings. The following land uses, with OLA's associated with them would qualify as NSA's: private homes such as single and semi-detached family residences; townhouses; multiple unit buildings such as apartments with OLA's for use by all occupants; hospitals or nursing homes where there are OLA's for the patients and day care facilities.

**Noise Sensitive Land Use** means a land use that is sensitive to noise, whether inside and/or outside the property and that must be planned and/or designed using appropriate land use compatibility principles. Examples of sensitive land uses include:

- Residential developments;
- Seasonal residential developments;
- Hospitals, nursing/retirement homes, schools, day-care centres;
- Other land uses that may contain indoor and/or outdoor areas/spaces where an intruding noise may create an adverse effect.

In general, a noise-sensitive land use could be any type of land use where environmental noise is likely to cause an *adverse effect* or material discomfort whether inside or outside of a building.

**Noise/Sound Barrier System** as referred to in this document, refers to the noise barrier as a system which includes the panels, posts, foundation, methods of design and construction details, finish and all other components as approved by the Region for inclusion in the Region's List of Approved Suppliers.

**Noise/Sound Barrier Walls** are free standing walls/structures made of concrete, wood, metal, vinyl or composite walls installed for the purpose of reducing the noise levels on adjacent properties.

**Official Plan (OP)** means the approved Official Plan of the Region.

**Official Plan Amendment (OPA)** means an approved amendment of part(s) of the Official Plan of the Region.

**Outdoor Living Area (OLA)** is the part of an outdoor amenity area provided for the quiet enjoyment of the outdoor environment. The OLA is typically an area at ground level accommodating outdoor living activities. For sound level calculation purposes, the usual distance from the dwelling unit wall is up to 3m, located near the mid-length of the corresponding side of the dwelling. The vertical height is 1.5 meters above the ground level. Where unknown, the side closest to the source of noise should be assumed. Paved areas for

Transportation Services

Standard Operating Procedures for Traffic Noise Mitigation on Regional Roads – November 2019

multiple dwelling residential units may not be defined as OLA. The OLA may include private areas used by individual dwelling occupants or "common" areas used by multi-tenant dwelling occupants. The OLA is also the part of an outdoor area easily accessible from the building and designed for the quiet enjoyment of the outdoor environment. Outdoor Living Areas include, but are not limited to, the following:

- Backyards, front yards, gardens, terraces or patios;
- Balconies, provided they are the only Outdoor Living Areas for the occupant and meet the following conditions; minimum depth of 4 m, outside the exterior building facade, unenclosed
- Common Outdoor Living Areas associated with multi-storey apartment buildings or condominiums that are noise-sensitive;
- Passive recreational areas such as parks if identified by the City for such use.

**Panel** The panel component of a noise barrier is that portion which, when joined together, produces a solid wall. In most cases, the panels span the distance between supports.

**Points of Reception** - Points of Reception are defined as residential noise sensitive areas along a Regional surface transportation corridor where it may receive "unacceptable" sound level.

The following land uses, with OLA's associated with them would qualify as points of reception under the above criteria:

- Private homes such as single family residences;
- Townhouses and
- Multiple unit buildings, such as apartments with OLA's for use by all occupants

Land uses listed below, by themselves do not qualify; except as previously defined in the "Noise Sensitive Land Use" as points of reception:

- Apartment or house balconies above ground floor;
- Educational facilities (except dormitories with OLA's)
- Places of Worship;
- Cemeteries or funeral homes;
- Public/Private Parks and picnic areas;
- All commercial areas;
- All industrial areas

**Posts** Are usually considered as vertical supports for the noise barrier panels.

**Roadway** includes a common public roadway, street, avenue, parkway, driveway or part of a roadway on a bridge or trestle which is intended for or used by the general public for the passage of vehicles and includes the area between the lateral property lines thereof.

**Rural Area** Where the sound environment is dominated by the sounds of nature and road traffic, if any, is infrequent.

**SADT** "Summer Average Daily Traffic"; defined as the average twenty-four hour, two-way traffic for the period 1 July to 31 August, including weekends.

**Sound** is a fluctuation in pressure, particle displacement or particle velocity propagated in any medium; or the auditory sensation that may be produced by it.

**Sound Level** is the A-weighted sound pressure level in dBA.

**Sound Pressure Level (Lp)** is 10 times the common logarithm of the ratio of the mean square pressure of a sound to the square of the reference pressure of 20 micro Pascal. Thus, the sound pressure level is expressed in decibels.

**Sound Transmission Class (STC)** is a single-number rating of the capacity of a structure to prevent sound from reaching a receiving location. It is calculated in accordance with ASTM Classification E413 using values of sound-transmission loss measured in accordance with ASTM Test Method E90. It provides an estimate of the performance of a partition in dealing with certain common sound insulation problems.

**Standard Operating Procedures (SOP's)** York Region's technical guidelines for the assessment and mitigation of noise due to regional roads and bus transportation corridors.

**Start Of Construction** is the anticipated construction year of a given road project segment as identified in the Region's 10-Year Roads Capital Construction Program. Beyond this Program, it is considered to be a placeholder year representing the following year after the ending year of the active (or expected) 10-Year Construction Program when completion of the environmental assessment is planned.

**Stationary Source of Noise** For the purpose of this document, a stationary source of noise is defined as: "Stationary source means all sources of sound/vibration; whether fixed or mobile, that exist/operate on the premises, property or facility, the combined sound/vibration levels of which are emitted beyond the property boundary of the premises, property or facility, unless the source(s) is (are) due to temporary "construction" as defined in the applicable municipal noise By-Law."

**Supplier** Refers to the manufacturer of the noise barriers / noise barrier system and/or its representative responsible for making the necessary technical submissions to the Region as well as the supply of the noise barrier system components. A list of York Region approved suppliers can be found on page 31 of this document.

**Time Periods** (MOE predefined time periods) "Day-time" is the 16-hour period between 07:00 and 23:00 hours. "Night-time" is the 8-hour period between 23:00 and 07:00 hours.

**Bus Transit Corridor** is defined as a roadway designed for the use by buses only and/or other vehicles.

**Urban Area** Where the sound environment is dominated by the activities of man

**Warning Clause** (Or "environmental warning/restriction") means a notification of or obligation to notify a potential purchaser of some environmental concern; in this case the concern is potential annoyance due a source of noise (Its application is not intended for stationary sources of noise).

## SCENARIO A – CAPITAL PROGRAM PROJECTS

### Purpose

The purpose of this SOP is to ensure that fundamental technical data is collected, interpreted and correctly used in evaluating noise mitigation on regional roads and bus transit corridors during road reconstruction projects.

The evaluation of noise mitigation is intended to relate to road sections that are being widened, newly constructed, or where received noise may be noticeably higher due to significant geometric, horizontal and vertical alignment changes. Noise mitigation should be investigated when a portion of the Regional Road network is being studied for purposes of increasing the carrying capacity of the road corridor in support of future transportation growth.

Full noise assessment is not required for road sections affected by minor operational improvements, road renewal undertakings or boulevard improvements. However, the noise consultant shall review the actual project limits based on the proposed design.

The following criteria must be established:

### Establishment of the Sound Levels

The daytime sound levels Leq 16hr should be established using prediction models acceptable to the Region. Actual field measurements may be used subject to York Region's prior approval, to deal with situations that may not be feasible to predict such as:

- Unusual traffic patterns or the presence of high percentages of vehicle classifications beyond those reported by the Region
- Traffic or roadway parameters that are outside of the limitations of the prediction model
- Downtown core areas
- The presence of large reflecting structures in dense urban areas
- Highly irregular topography
- The presence of other stationary sources of noise
- The presence of complicated geometrics for calculation purposes

Actual field measurements, if deemed necessary, are to be performed in accordance with the MOE procedures and generally accepted acoustic and traffic engineering principles.

### Road and Traffic Data

The acoustic consultant shall secure accurate and reliable traffic data, such as volume, speed and composition of existing traffic conditions, as well as traffic projections for the planned Capital Construction Program year and for the mature state of development year at the time of preparing the environmental traffic noise assessment. The “*Start of Construction*” and “*Mature State of Development*” years are defined at the beginning of this SOP.

In general, the traffic data shall consist of the following:

1. Volume of vehicles moving on hourly basis (two-directional)
2. Traffic Day/Night Split (percentage of all vehicles moving during the period from 7 a.m. to 11 p.m. and other volume moving from 11 p.m. to 7 a.m.)
3. Speed statistics (50th percentile, 85th percentile and volume weighted speed)
4. Traffic mix (percentage of vehicles, automobiles, medium trucks and heavy trucks).

5. The above information should be collected for minimum 3 full days during the weekdays (Tuesday, Wednesday, Thursday)

Where projects include road sections not shown in the Region's Road Construction Program, the acoustic consultant shall document provisions in the environmental assessment noise study to update the study in the future where construction is beyond 10 years of the assumed start of construction year. In particular, the noise study shall clearly indicate differing areas of planned construction commitments and possible *future construction commitments* by the Region, which *would be reviewed and updated in the future* should the start of construction year not be known.

### **Road Traffic Sound Level Predictions**

1. Road traffic noise shall be predicted by the Ontario Road Noise Analysis Method for Environment and Transportation (ORNAMENT) or by using the computerized version STAMSON
2. The noise study report shall detail information on all required adjustments to the model where applicable
3. Where there is more than one roadway noise source, the calculation of the combined sound levels is required
4. When predicting the sound levels due to regional roads, the following points shall be adhered to in the analysis and assessment:
  - a) Curved road sections, roads with varying grade elevations, four and more lane roadways and areas with multipart sound barriers/physical screening are to be assessed on the basis of multiple segments (e.g., upstream, downstream, traffic direction, localized screening).
  - b) Where sound barriers are involved in the analysis, calculations shall be performed at locations not exceeding five lots and/or dwellings.
  - c) Reliable grade elevations at the receptors, barrier base elevations and road elevations shall be established and included in the study.
  - d) The majority of barrier segments, where sound barriers are involved, should be in the acoustic "shadow zone". The use of acoustic "bright zones" is not acceptable, except for the remote segments.
  - e) The higher of the posted speed limit and actual driving speed (based on the 85th percentile) shall be used in the calculation of the sound levels.
  - f) Where heavy truck percentages exceed 5% of the total traffic volume and where sound barrier(s) are warranted, additional and supplementary analysis shall be included in the study by separating the analysis of each vehicle class separately prior to combining the sound levels of all vehicle categories.
  - g) All receptors that may have an outdoor noise sensitive land use component are to be identified and addressed in the study.
  - h) Where the receptors are outfitted with existing sound barrier(s), the study shall address the sound levels with such barrier(s). The general condition of the barrier that affects their acoustic performance shall be included in the noise study together with appropriate conclusions and recommendations.

## **Bus Transit Corridor Sound Level Predictions**

1. Bus movements between stations along the open at-grade sections of the bus transit corridor to be modeled using the ORNAMENT model based on knowledge of the applicable future bus movements by the Region.
2. For a bus transit terminal, other calculation routines and/or models must account for all noise events generated by a typical station based on the MOE "Stationary Sources" criteria.

Factors affecting the overall hourly Leq due to a typical terminal must be included in the assessment.

The input data and the various assumptions used shall be clearly documented in the report.

## **Ambient Sound Levels Due to Other Sources of Noise**

Ambient sound levels due to other sources of noise will be established by procedures acceptable to the Region.

Reference should be made to applicable MOE guideline publications and procedures.

## **Impact on Future Developments**

During the preparation of a noise study for a capital works project, the Consultant must obtain information from the Planning and Development Department in the area municipality and York Region on future development applications in proximity to the proposed regional road and/or bus transit corridor undertaking for further examination.

The information shall include:

- Copies of the relevant plans
- Status of approvals by the approval authorities
- Existing or proposed grade elevations of the proposed development

Copies of noise study reports that may have been submitted by the proponent to the approval authorities, etc.

The Acoustical Consultant shall review all relevant information in these documents for noise and their recommended noise control measures. The results of this review shall be compared with the relevant technical details related to noise assessment of the subject undertaking and differences or inconsistencies; if any, should be noted and reported.

York Region shall be advised of any discrepancies in the resulting sound levels and the extent of noise mitigation for both; the development side and the subject undertaking.

## **Weekend Traffic or Summer Traffic**

While the use of the AADT for noise assessments is the common practice, special consideration may be given to situations where the weekend traffic or summer traffic (SADT) may be more dominant.

Appropriate adjustments to the calculated sound level shall then be applied in such situations.

The results and recommendations in this respect shall be implemented.

## Operational Statements from Council (TWC Report No. 3 – March 23, 2006)

### **Tree Removal & Compensation:** Tree removal will be avoided wherever possible.

However, tree removal will be required in many instances where trees are located on or close to the property line. Compensation will be provided where privately owned trees are removed in the form of either replacement trees or financial compensation. Where removal is required for trees within the public right-of-way landscaping will be provided on the public side of the noise barrier.

### **Noise Mitigation Warrants:** On capital road projects where noise mitigation is warranted it will only be implemented where it will be effective. In situations where noise levels warrant mitigation but it is not implemented due to the inability for it to noticeably reduce noise levels (i.e. to protect the OLA due to changing topography), it is recommended that staff be authorized to provide additional tree planting on the public right-of-way where space permits to assist in providing visual screening from the road. The type and location of trees to be planted will be at the discretion of regional staff.

### **Existing Noise Barriers:** On capital projects where privately owned noise barriers already exist along reverse frontage properties new noise mitigation will not be provided. At the time when those developments were approved it was identified that noise levels warranted noise mitigation due to traffic on the Regional road. Purchasers of these homes knowingly assumed the responsibility of maintaining the noise barriers provided by the developer as part of their home purchase. In addition to development approval records, as part of the noise policy update study a complete inventory of the types and condition of privately owned noise barriers along Regional roads was completed. Attempts by private owners to remove existing noise fences in order to qualify for new noise barriers as part of a York Region capital project will be denied and these owners will be required to reinstate the noise barrier through enforcement of municipal property standards by-laws.

### **Scenario Guidelines**

On capital projects, different situations may arise where property, land-use, or mitigation use may need to be considered in special context during the preparation of the noise study. Where the identified situations exist, the Region has provided additional guidance to be used for handling specific scenarios. The Acoustical Consultant shall use the guidelines to develop a common approach throughout the study for the purposes of assessment and design.

***Refer to page 34 for the attached SOP Supplement Document: Scenario Guidelines.***

- Noise Sensitive Uses – Special property cases
- Land Compatibility – Alternative barrier alignment cases
- Community Integration – Barrier layout site evaluation cases

The supplement guidelines are to be followed and used as an inclusive part of the Standard Operating Procedures for Capital road projects.

## SCENARIO B – RETROFIT APPLICATIONS

### Purpose

The purpose of this SOP is to establish the technical criteria and priority scheme for determining where retrofit noise mitigation is to be implemented on a Region-wide basis, responsibilities for retrofitting noise barrier construction and maintenance costs and how owners/residents can petition the Region.

### Requests for Retrofitting

A petition requesting the installation of a noise attenuation barrier must be signed by the landowner as required under the Municipal Act and submitted to the Clerk of the Region.

At least two-thirds of the affected property owner(s) representing at least one-half of the required properties to qualify for the work must sign the petition to qualify for the retrofit project.

### Candidate Sites

All existing residential development on sections of Regional Road allowances which have existing reverse frontage/flanking homes and meet the York Region's Policy criteria for retrofit locations will be considered on a case by case basis by Regional Council.

The prioritization of these sites will be on the basis of need, cost, benefit derived, and number of receivers, which are being protected.

### Exclusions & Limitations of the Policy

It is not the intent of this Policy to construct retrofitting noise barriers along all regional roads and identified candidate or prioritized sites. Factors such as budgetary limitations and site suitability need to be considered.

This policy is not intended to mitigate other sources of noise such as roadways under the jurisdiction of the local municipality, Provincial Highways, railways and other facilities which are not Regional infrastructure. Situations where a new regional road will be constructed adjacent to existing homes must then determine if noise abatement features are required.

If warranted, they must be incorporated into the design as part of the Class Environmental Assessment process.

The application of retrofit sound barriers along regional roads and bus transit corridors does not apply to the following:

1. Residential buildings that front directly onto a York Region facility.
2. Isolated flanking lots that are not part of a plan of subdivision.
3. Small groups of homes of less than 5 dwellings.
4. Existing residential buildings that are partially noise protected by existing inefficient and/or deficient sound barrier(s).

5. Existing development where the application of retrofit noise barriers would require construction of other additional infrastructure in order to be effective that are beyond this policy (i.e. retaining walls).
6. Where warning clauses have been included on title of purchase and residents acknowledged potential for elevated noise levels due to traffic. In these scenarios, residents have waived their rights for retrofit eligibility.

### **Noise Sensitive Points of Reception**

1. Noise sensitive points of reception that qualify for application to the retrofit program shall meet the following criteria:
  - Residential areas adjacent to a Regional Road.
  - Reverse frontage lots or blocks including flanking units where the outdoor living areas (OLA's) are directly exposed to traffic noise.
  - Residential areas that have OLA's associated with the residential unit such as a backyard. The OLA must be clearly defined, as it will be subject to further technical analysis.
2. The following land uses with OLA's associated with them would qualify as points of reception:
  1. Single family residences
  2. Townhouses
  3. Multiple unit residential buildings; such as apartment buildings with Common OLA's. It is to be noted that the paved driveways of multiple dwelling units do not qualify.

### **Sound Level Criteria**

The method for calculating noise levels will be in accordance with the MOE Guidelines, i.e. Ontario Road Noise Analysis Method for Environment and Transportation (ORNAMENT) Technical Document, Ontario Ministry of Environment and Energy, ISBN 0-7729-6376, 1989 as modified by the Region to suit the local conditions and other technical adjustments prescribed by the Region.

Areas that qualify as noise-sensitive points of reception shall meet the following criteria:

- The area/site specific sound levels will be established by the Region in accordance with the technical procedures specified by the Region, as amended from time-to-time.
- The sound levels will be established based on the existing and future road and traffic parameters such as the traffic volume, percentage of trucks, posted speed limit/actual driving speed, road gradient, etc.
- The objective sound level for the retrofitting Policy is Leq daytime (7:00 a.m. to 11:00 p.m.) Leq (16hr) 60 dBA after attenuation for future traffic conditions.

- The Region will give consideration to all feasible traffic noise control measures when considering an area for noise barrier retrofitting purposes.

If a noise barrier is to be constructed as part of the retrofitting Policy, subject to the criteria and warrants in this Policy, it must achieve a minimum Insertion Loss (IL) of 6 dBA reduction when averaged over the first rows of the points of reception.

### **Noise Barrier Technical Criteria**

The use of noise barriers as retrofitting noise mitigation measures will be subject to the following technical criteria:

1. The sound barrier must be installed on a complete block to ensure its effectiveness.
2. Retrofit noise barriers will be constructed on along the property line of the ultimate right-of-way, but within the landowner's private property. Ownership and ongoing maintenance shall be the responsibility of the homeowner. Barriers shall not interfere with easements, utilities, drainage patterns and significant/mature trees.
3. Where deemed necessary, each section of the noise barrier will be individually designed (location, height, extent, material) and cost estimates will be prepared accordingly.
4. It is the Policy of the Region to use noise barrier walls for retrofitting purposes where berms or berm/wall combinations are not feasible due to property constraints. The use of berms as a base for a noise retrofitting barrier may be considered on a case-by-case basis only; where technically warranted and where space exists for such structures.
5. The type of barrier material and color will be selected in accordance with York Region Standards and through consultation with the homeowners.
6. The cost of noise attenuation within an individual dwelling or an outdoor area that is not part of the approved points of reception will be the sole responsibility of the homeowners.
7. The minimum height of a noise barrier wall for retrofit purposes is 2.2 meters as measured from the barrier base elevation. The Commissioner of Transportation Services can approve noise attenuation barrier fences up to a maximum height of up to 3.0 meters in situations where deemed appropriate and where approved by the local municipality.

Materials for constructing noise barrier fences shall be in accordance with the materials approved by York Region and have a minimum mass surface density of 20 kg/sq.m or (4lb/sq.ft.). Noise barriers shall be constructed without cracks or gaps.

8. If required, property owners at the termination points and/or where required for the noise abatement wall will be asked to register an easement to York Region for the construction and maintenance of a noise wall along a side lot line.

### **Construction and Maintenance**

Issues related to construction and maintenance of the retrofitting noise barriers will be subject to the following requirements:

1. The acoustic and engineering design and construction of the retrofitting noise barrier will be undertaken by the Region.

2. The design and material specifications for the wall shall be in accordance with York Region Standards and shall be discussed with the benefiting homeowners and shall also be circulated to the area municipalities for review and comment.
3. Each noise wall constructed shall be in accordance with the MOE acoustical specifications and other engineering specifications acceptable to the Region.
4. Ongoing maintenance shall be the responsibility of the homeowner.
5. Should the proposed sound barrier and other associated details be approved by the benefiting homeowners, the homeowners will be required to enter into an agreement with the Region to construct and to maintain the barrier as well as to pass the necessary By-Law as prescribed under the Act.
6. Consideration will be given by the Region to aesthetic impacts when designing noise control measures as well as the safety and security of pedestrians and motorists.

### **Costs and Priority**

All costs associated with the retrofitting will be subject to the following requirements:

1. Requests for retrofitting will be received by the Region and will undergo initial screening and prioritization (if all warrants for construction are met) in relation to other retrofitting requests and the budget allocated by the Region for barrier retrofitting. Based on the approved funding, the cost of the approved retrofit noise mitigation will be shared equally (50/50) between York Region and the benefiting homeowners.
2. The overall cost associated with the retrofitting noise barrier, including the flanking ends, will be estimated by the Region and each owner's proportional share will be assessed (prorated) on the basis of their rear lot frontage and the flanking ends, if applicable where the sound barrier will be installed.
3. Retrofit requests will be dealt with on a case by case basis, prioritized based on this Policy, and subsequently included in the capital budget in accordance with the availability of funding.
4. The minimum number of residences to be considered for this policy is 5 dwelling units and 50 linear of noise barrier.
5. The Regional subsidy will apply to a maximum average lot width (calculated for the subject area) of 20 meters.

### **York Region Staff Responsibilities**

All administrative and financial procedures shall conform to the Regulations under the Municipal Act.

The following are the technical responsibilities that have been assigned to York Region staff in regards to retrofitting:

1. York Region staff shall be responsible for updating the priority list or ranking for retrofitting purposes based on the most current road and traffic data.

The following are technical activities that may be carried out by or on behalf of the Region to update the priority listing:

- a) Update traffic data (AADT, speed, truck percentages, day/night split, etc.) for all road sections.
- b) The noise prediction model to be run using the updated traffic data.
- c) By using the noise prediction model and previously established distances, new barrier heights required to achieve 60 dBA in the Outdoor Living Areas shall be calculated and the data then entered into the priority candidate list for regional roads.
- d) Noise barrier material costs (i.e. wood, concrete or other suitable barrier products acceptable to the Region) to be updated regularly and entered into the priority candidate list.
- e) Other demographic data, such as the number of affected dwelling units, to be updated and entered into the priority candidate list to update the previous data.
- f) Areas not requiring sound barriers or those not qualified for the sound barrier retrofit program to be identified and the data in the spreadsheet model to be revised accordingly.

2. Upon receipt of a petition or request for retrofitting from the public, the staff shall visit the area of concern and investigate the area for any abnormal conditions that may have been responsible for generating the noise complaints.
3. The subject area or road sections shall visually be reviewed for technical feasibility of a retrofit barrier and also be checked against the priority list/ranking scheme and verified to warrant further consideration.
4. Staff shall, if the subject area meets the retrofit policy warrants, prepare the necessary technical and financial details in accordance with the Regulations under the Municipal Act based on the necessary considerations including, but not limited to, the following:
  - a) Up-to-date road and traffic data
  - b) Review of alternative outdoor noise abatement features (if any exist) to meet the specified criteria.
  - c) Recommend the most effective outdoor noise abatement feature at the study site.
  - d) Ground elevations at the road, the points of reception and the base of a potential noise barrier.
  - e) Proposed noise barrier extent and location alternatives.
  - f) Possible interference, obstructions such as utilities, daylight triangles, drainage, etc.
  - g) Produce drawings to a reasonable scale showing the residential points of reception of concern, the road section, the possible location(s) of the noise barrier, etc.
  - h) Prepare detailed sound level calculations for the subject area to comply with the technical criteria of this Policy based on a minimum of one calculation for each group of three adjacent receptors, or as required.
  - i) Preparation of cost estimates for the work.
5. For specific situations, the Region may conduct actual field monitoring of the sound levels where deemed necessary (e.g. difficult topographic situations, the presence of unusual or numerous sources of transportation sources of noise, etc). A complete package together with a summary section shall be made available to all the affected homeowners, their duly appointed representatives and the local municipality.

6. The Summary Section shall provide clear and concise information as per the Municipal Act and to also include the following:
  - a) Barrier details (extents, height, location, material, color, etc.).
  - b) The acoustic benefit to be derived including summary of the established sound levels before and after the barrier.
  - c) Estimated cost of construction (total costs)
  - d) Approximate timing of construction
  - e) Other complications, implications, site difficulties, etc.
  - f) The decision including the Region's financial share.

## SCENARIO C – DEVELOPMENT PLANNING APPLICATIONS

### Purpose

The purpose of this SOP is to establish noise criteria for planning of sensitive land uses, in support of the Provincial Policy Statement under the Planning Act and in accordance with the Official Plan policies of York Region. It is intended for use in planning of new noise sensitive land uses adjacent to regional roads and bus transit corridors.

The following criteria must be adhered to:

### Noise Assessment Criteria

Transportation noise in general and road traffic noise in particular is a main contributor to the environmental noise climate in all urban areas.

#### 1. Sound Levels

The daytime (Leq 16hr) outdoor sound levels from regional roads and bus transit corridors at the site of a proposed noise sensitive land use shall be established using methods acceptable to York Region and in accordance with the March 23, 2006 – York Region Council Approved Noise Policy. All other daytime (Leq 16hr) and nighttime (Leq 8hr) sound levels should be established using compatible methods generally accepted or prescribed by the local municipality or by any other approval agency. Stationary source sound levels are outside the extent of this SOP.

#### 2. Day-time Outdoor Sound Level Criterion

The March 23, 2006 – York Region Council Approved Noise Policy provides the equivalent sound level (Leq) criterion in the designated Outdoor Living Area. The criterion applies to the entire day-time period from 07:00 to 23:00.

### Noise Impact Assessment

In cases of multiple transportation noise sources such as rail and air traffic affecting a development application in proximity to a Regional Road or bus transit corridor, the following procedures shall be followed:

- a) The outdoor noise impact due to air traffic shall be established separately from the impact due to road traffic.
- b) The outdoor noise impact due to road and rail traffic shall be combined.
- c) The indoor noise impact shall be assessed separately for road, rail and aircraft noise.
- d) The required indoor noise control measures for the multiple source impact are then defined by a combined acoustical insulation parameter (descriptor) that is evaluated by combining the acoustical insulation parameters determined for each of the sources.

When predicting the sound levels, the following points shall be adhered to in the analysis and assessment:

1. Curved road sections, roads with varying grade elevations, 4 and more lane roadways and areas with multipart sound barriers/physical screening are to be assessed on the basis of multiple segments (e.g., upstream, downstream, traffic direction, localized screening).

2. Where sound barriers are involved in the analysis, calculations should be performed at more frequent locations (at every 5th dwelling unit/lot or less).
3. Reliable grade elevations at the receptors, barrier base elevations and road elevations are to be established and to be included in the study.
4. Where sound barriers are proposed, the “Acoustic Shadow Zone” cast by the noise barriers or other noise mitigation devices shall protect the OLA.
5. The higher of the posted speed limit or actual driving speed (based on the 85th percentile) shall be used in the calculation of the sound levels.
6. Where heavy truck percentages exceed 5% of the total traffic volume and where sound barrier(s) is warranted, additional and supplementary analysis shall be included in the study by separating the analysis of each vehicle class separately prior to combining the sound levels of all vehicle categories.
7. All receptors that may have an outdoor noise sensitive land use component are to be identified and addressed in the study.

In all cases, consideration should be given to future sound levels. For regional roads and bus transit corridor noise, the mature state of development road and traffic data shall be used for noise prediction purposes based on data provided (or sanctioned) by York Region.

The land proponent shall be responsible for securing any additional speed study data. Based on timing and availability, the Region can gather/provide this data upon request (extra fee may apply) that would be separate from any request for future projection traffic data.

### **Prediction of Road Traffic Noise**

The assessment of road traffic noise impact is evaluated by prediction using statistically averaged road traffic information, normally the AADT (Annual Average Daily Traffic). The MOE prediction method for road traffic noise, recommended by York Region, is a method entitled ORNAMENT, Ontario Road Noise Analysis Method for Environment and Transportation, published in 1989. The descriptors used are the 16-hour day-time sound levels, Leq (16hr) and the 8-hour night time sound levels, Leq (8hr) for regional roads and bus transit corridors. The Region may, however, recommend the use of other enhancements and procedures to the application of the ORNAMENT.

In order to comply with the policy and other local or provincially recommended guidelines, the predicted sound level is to be assessed in an Outdoor Living Area, and at the plane of window location for indoor habitable areas. Where the noise impact exceeds the applicable criteria, warning clauses and mitigation measures such as site planning, architectural design, noise barriers, special building components and/or central air conditioning may be necessary.

No noise control measures are required if the ultimate predicted sound level estimated in the Outdoor Living Area is Leq (16hr) 55 dBA or less during the day-time and Leq (8hr) 50 dBA or less in the plane of bedroom windows during the night-time.

### **Application of Criteria**

The noise criteria in the policy applies to the development of noise sensitive land uses affected by noise produced by vehicular traffic. Recognizing the variation of human response to transportation noise and, at the same time, the possible difficulties of implementing noise control measures in some situations, the Region may allow certain flexibility in the sound level criteria in the Outdoor Living Areas. The application and the allowable flexibility of the criteria are described below.

If the day-time sound level in the Outdoor Living Area is Leq (16hr) 55 dBA or less and the night-time level in the plane of bedroom windows is Leq (8hr) 50 dBA or less, no further assessment is required.

In case of a marginal excess over the criteria, the proponent has to demonstrate and satisfy the Region and the local municipality that it is not technically feasible to meet the Leq (16hr) 55 dBA sound level criterion. (The maximum allowable tolerance above the 16hr (day) 55 dBA is 5 dBA, which must be clearly shown and justified by the proponent). In such cases, the prospective occupants of the new land use should be notified by means of a warning clause. This clause should be included in the Agreements of Purchase and Sale, and incorporated into the relevant Development Agreements which are registered on title of the property.

Where it can be clearly demonstrated that it is not technically or economically feasible to achieve the Region's outdoor sound level criterion, a tolerance not more than 5 dBA above the stated criteria may be allowed, providing the prospective occupants of the new land use are notified by means of a warning clause. The tolerance, and the accompanying warning clause, is only allowable in conjunction with the sound levels in the Outdoor Living Area; the tolerance is not accepted for the indoor sound level criteria.

### **Assessment Locations**

For the purposes of the noise impact assessment in an Outdoor Living Area, the protected area is approximately 56 m<sup>2</sup> (600 ft<sup>2</sup>) for single family dwellings, 46 m<sup>2</sup> (500 ft<sup>2</sup>) for semi-detached units and 37 m<sup>2</sup> (400 ft<sup>2</sup>) per unit for row housing. The local municipality shall be consulted and approve the use of smaller areas and/or certain locations for site specific applications. For the purposes of noise impact assessment in an Outdoor Living Area, the point of assessment is typically 3 meters from the building facade and 1.5 m above ground.

For the purposes of noise impact assessment in the plane of a bedroom window, the point of assessment is typically 2.5 m above ground for ground floor rooms and 4.5 m above ground for second storey rooms (or higher as appropriate for the site specific case) unless the dwelling is a multi-storey building.

The noise impact assessment in the Outdoor Living Area or in the plane of a window shall be performed in terms of a "free-field" sound level which is the sound level not affected by the presence of the building under assessment. The prediction method ORNAMENT yields the "free field" sound level.

## SCENARIO D – REPLACEMENT APPLICATIONS

### Purpose

The purpose of this SOP is to establish rules and responsibilities in areas of noise wall replacement where a potential safety hazard exists.

The following criteria must be established:

### Noise Wall Safety Criteria

1. Potential hazards will result in the owners being directed to correct the problem within a fixed time period.
2. Failure to comply shall result in Regional staff working with Local Municipal staff to have unsafe sections dismantled and have removed materials either disposed of or stockpiled on or adjacent to the owner's property.

All costs incurred will be back charged to the homeowner with the assistance of the governing local municipality via the Property Standards Act.

## MATERIAL STANDARDS & CONSTRUCTION SPECIFICATIONS

### 1.0 APPLICATION

The material standards and construction specifications presented herein shall be used for Capital Program Projects, Retrofit Applications, and Development Planning Applications and sound barrier replacement applications.

York Region will consider the following range of products types for noise attenuation on regional roads, these being:

1. Precast concrete panels
2. Precast concrete sections
3. Wood sound barrier walls (mostly in the form of board-on-board walls/acoustic barrier fences, refer to the appendices in these SOP's)
4. Brick veneer masonry construction
5. PVC panels
6. Recycled products
7. Steel panels
8. Natural stones
9. Composite sound barrier materials such as with the use of a combination of the above panels and in particular the variety of posts. The posts also exist in various forms.
10. Earthen berms and/or combination with above

**Note: Only wooden barrier systems shall be used for capital program projects and retrofit applications.**

### 2.0 DESIGN

The details presented in this Standard refer to noise barriers as a total and integrated system of various components including the base berm, if any, the wall, and all other associated components, as defined herein.

All individual components shall be designed to be capable of being assembled on site and to conform to the drawings and specifications. The panels to also be designed to facilitate ease of on-site replacement.

The design of the system shall be site-specific and in accordance with the latest edition of the Canadian Highway Bridge Design Code (CHBDC), prepared by qualified Professional Engineers and Acoustic Consultants. Input will be required from Geotechnical and/or Structural Engineers.

The noise barrier shall be designed to withstand all possible forces and loads encountered during the design life of the barrier and remain serviceable. The design shall be site specific with reference to the wind pressure, earthquake load, freezing depth and soil conditions.

The foundation of the barrier wall shall be designed to be founded on undisturbed soil, and at required depth of embedment as per the design requirements, but not less than the depth of freezing of the area.

### **3.0 ACOUSTICS**

#### **3.1 MATERIAL DENSITY/SOUND TRANSMISSION CLASS (STC) REQUIREMENTS**

For a panel to be qualified as a sound barrier material, one or more of the following conditions should be met:

- The surface density of the panel material to be not less than 20 kg/sq.m.
- The Sound Transmission Class (STC) of the panel material to be 20, or greater, when tested in accordance with ASTM-E90 (a test report to be submitted for approval).
- The Sound Transmission Class (STC) of the panel material has historically been demonstrated to be 30 or greater.

In addition, sufficient measures are to be taken to prevent drumming of the panels caused by wind or ground vibration.

#### **3.2 NOISE REDUCTION COEFFICIENT (NRC)**

If the noise barrier system is specified by the Acoustical Consultant to be sound absorptive, the barrier panels should be tested to determine the Noise Reduction Coefficient (NRC) in accordance with ASTM-C423. A panel or an assembly of panels should be tested, as required, in accordance with the ASTM Procedures for free-standing screens.

The use of alternate methods of providing the necessary sound absorptive qualities by a barrier system should be subject to special approval by the Region based on qualified technical data to be submitted by the proponent. This may include the use of double walled noise barrier panels (sandwich construction with perforated facing) or the use of substantial landscaping designs along the barrier faces by a Landscape Architect.

#### **3.3 EXPANSION JOINTS**

The noise barrier is to be designed and installed so as to accommodate movement of the noise barrier panel during the weather cycle without placing undue stress on any structure and the noise barrier installation, or reducing acoustical attenuation. The joints in the noise barrier are to match the size and location of the structure joints.

### 3.4 HEIGHT

The noise barrier system design should provide details of methods and materials to be used to accommodate varying wall heights above the top of footing.

### 3.5 PANEL ORIENTATION

Noise barrier elements should be designed and oriented to minimize entrapment and ponding of water, and accumulation and infiltration of dirt and debris inside and on any surface of any component. Corrugated, or ribbed panels, should be mounted such that the features are oriented vertically.

### 3.6 PANELS WITH FIRE HOSE ACCESS

Noise barrier panels with fire hose access openings, if required, shall be designed with additional reinforcement and protective coating around the opening, as necessary, to maintain structural integrity.

## 4.0 MATERIALS

### 4.1 GENERAL

For materials, not specifically included in this section, the manufacturer should demonstrate to the Region that the material has a minimum predicted maintenance free lifespan of 20 years.

All materials should have a flame spread classification less than, or equal to, 140 and smoke developed classification less than, or equal to, 180 when tested in accordance with the ULC standards.

Metal and non-metallic components of noise barrier systems, including their performance, such as corrosion and weathering, to be in accordance with the applicable CSA, ASTM, CAN/L1LC, ULC, CSA/CAN and ANSI standards.

### 4.2 COATINGS

Coatings refer to all paints, stains and laminates. All coated components to be rated for accelerated weathering. All coated steel components to be resistant to corrosion.

Components which are hot dip galvanized, or coated with a polyvinyl chloride (PVC) plastisol using an epoxy primer using no adhesives for bonding, need not have accelerated weathering test data

### 4.3 CONCRETE PANELS AND POSTS

#### 4.3.1 CAST-IN-PLACE

Cast-in-place concrete to conform to the requirements of the CSA Standards.

#### 4.3.2 PRECAST

Precast concrete to conform to the requirements of the CSA Standards.

#### **4.4 STEEL REINFORCING**

All steel reinforcing to conform to the requirements of the CSA Standards. The bars to be free from rust, scale, or other substances, that will prevent bonding.

All reinforcing bars should be epoxy coated, conforming to ASTM Standards. The concrete cover over the steel reinforcing should meet the requirements of the CSA Standards and in no case should it be less than 50mm.

#### **4.5 BARE METAL COMPONENTS**

All bare metal components to be either fabricated of nonferrous materials or hot dip galvanized after fabrication, according to the requirements of CSA Standards. All welding to conform to CSA Standards.

#### **4.6 COMPOSITES AND METAL PANELS**

Steel panels, exposed to traffic and snow removal operations, to be minimum nominal 0.91 mm galvanized steel (20 gauge). All other panels to be of minimum nominal 0.76 mm galvanized steel (22 gauge). All steel sheeting components to be coated with a material meeting the requirements of this standard.

Acceptable products include galvanized panels and then coated with an organic polyvinyl chloride (PVC) plastisol using an epoxy primer using no adhesives for bonding. The coating system thickness must be 200 um on the surfaces exposed to traffic and snow removal operations and 100 um thick on all other panel surfaces.

Pop-rivets shall be either aluminum, with an aluminum mandrel, or aluminum, with a stainless steel mandrel.

Other composites or metal panels, such as aluminum, may be used as panels for sound barriers, provided that such products are corrosion resistant and meet the acoustic and other performance criteria in this Standard.

#### **4.7 SOUND ABSORPTIVE QUALITY**

If the noise barrier system is specified by the Acoustical Consultant to be sound absorptive, the average Noise Reduction Coefficient (NRC) shall be not less than 0.70 (70%). Sound absorptive materials used to fill cavities in double walled noise barrier systems, to increase sound absorption, shall be semi-rigid type.

#### **4.8 WOOD COMPONENTS**

All wood products to be made out of graded lumber (conforming to National Lumber Grading Association or Standard Grading Rules of Canadian Lumber 2000) and to be either naturally resistant to decay for a minimum of 20 years, or to be pressure treated. The panel must be composed of tightly fitted wood boards so as to avoid warping, splitting and loosening of particles, knots and imperfections. All boards must be tightly butted and secured.

The use of board-on-board panels to meet the stated density/acoustic criteria is acceptable provided that the boards are thoroughly secured. In addition, board-on-board panels shall have tightly butted joints that are staggered, with provision to allow for expansion/contraction, and for making the necessary field adjustments (e.g. for tightening up of developed gaps), where required.

The use of Tongue and Groove, and V-joints for joining panels is acceptable provided that the tongue or V-joint extent is not less than 19mm (3/4") long.

Nails, and other fastening devices, must be either hot dip galvanized steel, or made of nonferrous or stainless steel.

When there is ground contact with wood, the wood must be pressure treated and cut ends to be treated also, or protected from moisture penetration.

For wooden noise barriers, the following are the minimum acceptable features to qualify as an acceptable noise barrier system:

1. All wood shall be selected for good appearance and free of defects and large/heavy knots. In addition, all torn grain and surface stains shall be eliminated by appropriate surface refinishing.
2. All skirts, coming in contact with the ground/soil, shall be pressure treated with finished cut edges treated or protected from moisture penetration, and to be buried 100 to 150mm below the finished ground level.
3. All exposed panels to be dressed with beveled edges on both sides.
4. All wooden posts (metal posts are also acceptable) to have minimum dimensions of 140 x 140mm, or larger, as required by the governing code, dressed to pattern.
5. Double posts are required on all directional changes greater than 20°.
6. Install coping on top of panels using one piece wood (or other acceptable metal products)
7. The use of decorative elements such as pilasters, curved (scalloped) top rail, post caps, wood designs, etc. is preferable. In all cases, the decorative elements should not affect the minimum barrier height requirements, the density, or any other acoustic/structural requirements.
8. Wood, and/or metal frames, to be used to support the wood panels in place, and to be designed to allow expansion/contraction of the wood panels/elements, and for making the necessary field adjustments, where required.
9. All metal components, if any, used in a wooden sound barrier to conform to the metal or steel component specifications in this Standard.

#### **4.9 BRICK**

All bricks used to be in accordance with the CSA standards.

#### **4.10 GRANULAR MATERIAL**

All granular materials shall be free from deleterious materials, debris and organic materials. When used, it shall be compacted to 98% of Standard Proctor Dry Density.

### **5.0 INSTALLATION AND CONSTRUCTION**

All work and noise barrier materials for specific installations are subject to field certification by the design professionals to ensure adherence to the requirements in this specification.

All materials delivered to the construction site should be visually inspected by the owner, and/or their representative, for proper dimensions, cracks, voids, surface defects, inconsistency in color and texture, and any other damage or imperfections.

## 5.1 HEIGHT AND ALIGNMENT

The noise barrier shall be constructed to the height and alignment as specified on the standard drawings at the end of this document.

## 5.2 FOOTINGS, POSTS AND PANELS

The foundation, footing and post design, shall meet the objective of constructing a durable sound barrier that meets or exceeds the objectives of this Standard of a 20-year life expectancy and the set minimum guarantee of 5 years for material and installation of the noise barrier system.

### 5.2.1 FOOTINGS

The footing shall be founded on undisturbed soil at the design embedment length as required but shall be minimum below freezing depth of the area. The founding surface shall be confirmed by a Geotechnical Engineer. All the soft spots to be removed and bottom of the footing protected from freezing. In case of solid rock encountered at a depth less than the freezing depth, foundation shall be carried minimum 300mm in the rock. The concrete of footing shall be as follows:

1. Minimum 28 days compressive strength to be 20 Mpa
2. Ready mix concrete or site mix concrete to confirm to CSA-A23.2
3. All site placed concrete to be protected from freezing and to be protected in excessive summer temperature from drying.
4. The concrete in the footing shall be cured for a minimum period of 5 days before the installation of panels.

### 5.2.2 FOOTINGS IN EARTH

If drilled footing is used, it shall be cast entirely against undisturbed soil. Footing other than drilled caisson to be formed and the excavation shall be backfilled with granular material. The backfilled material to be compacted to 98% Standard Proctor Dry Density of the granular material.

### 5.2.3 FOOTINGS IN ROCK

When rock is encountered within the excavation depth of the footing, the footing depth to be embedded minimum 300 mm into the solid rock.

All excavation into rock shall be back filled entirely with concrete. The excavation above the top of rock may be formed to the required dimensions and the remainder of the excavation backfilled with granular materials.

## 5.3 POSTS

The barrier shall be constructed to the line and grades specified with the tolerance of  $\pm 10\text{mm}$ . The post shall be plumb within a tolerance of  $\pm 10\text{mm}$  in 5m. In all cases for wood posts, the minimum dimension shall be 150mm square.

## 5.4 PANELS

The profile of the barrier shall be installed to match the ground profile up to the maximum grade specified on the drawings. To accommodate ground profiles greater than the maximum grade, the barrier shall be stepped in accordance with manufacturer's recommendations.

## 5.5 SITE GRADING AND PREPARATION

Earth grading and berm construction associated with the barrier installation shall be completed to within 25mm of the proposed elevation of the bottom of the barrier. Grading shall be completed and approved prior to construction of the barrier footings.

To prevent openings from occurring under the barrier an additional timber, not less than 5mm x 20mm in section, shall be securely fastened horizontally to the bottom of the barrier, and shall extend the full width of each barrier panel between adjacent vertical posts. This additional timber shall be buried to a depth equal to one-half its width during the final grading operation. Earth and pavement grading shall be sloped at a minimum of 2% and a maximum of 50% away from the barrier.

Frozen earth shall not be used for embankments. Where imported fill is required for backfill or for minor grading, the fill material should be comprised of granular material, select sub-grade material, or other approved fill and to be compacted to at least 98% Standard Proctor Maximum Dry Density (SPMDD). All graded earth to be compacted to at least 98% Standard Proctor Dry Density.

The earth area surrounding the barrier wall shall be sloped away in order to prevent water ponding and water filtration to the barrier footings.

Changes in alignment to occur at the posts, by suitable means, to avoid acoustical degradation.

## 5.6 MASONRY WALLS

Masonry walls to be installed in accordance with the requirements of AASHTO Guide Specifications for Structural Design of Sound Barriers.

Bricks to be installed on a suitable foundation not less than 500 mm above the final ground line.

The top row of all masonry walls and posts to be protected with coping and/or flashing.

Mortar used to set the bricks, shall be in accordance with the CSA Standards.

## 5.7 FIRE HYDRANT ACCESS

When the installation of a noise barrier interferes with the access to existing, or proposed fire hydrants, the noise barrier installation should include fire hose access openings and associated identification signs. Location and demand for these openings to be established in cooperation with the local fire department.

## 5.8 OVERHEAD HIGH VOLTAGE LINES

Where the potential of arcing exists, due to the close proximity of existing overhead high voltage lines, each metal panel and girt must be grounded in accordance with CSA Standards and the local hydro / utility company.

## **6.0 OTHER CONSIDERATIONS**

### **6.1 AESTHETICS**

The design of noise barriers should also have regard for the following:

1. The applicable urban design guidelines and landscaping requirements.
2. Drainage, grading, landscaping design and aesthetic principles.
3. The design of the barrier should be complimentary with nearby existing barriers.

### **6.2 LANDSCAPING**

Soft landscaping, that could include trees and vines, to be included in all barrier projects.

### **6.3 RESONANCE (DRUMMING EFFECT)**

To avoid excessive resonance by certain noise barrier wall materials, such as metal panels, the barrier system to be designed to reduce this phenomenon by acceptable means such as the use of additional stiffeners, the application of noise damping compounds, sandwich construction, etc.

## **7.0 APPROVAL BY THE REGION**

### **7.1 NOISE BARRIER SYSTEM**

In order for the noise barrier system design, and materials, to be qualified and be considered for approval, for installation at a specific site, the submission should provide the following:

- a) The trade name of the product, if applicable.
- b) The manufacturer's name and address.
- c) Certification by a Geotechnical Engineer (calculations may be requested).
- d) Certification by a Structural Engineer (calculations may be requested).
- e) Detailed drawings of the entire noise barrier system and all its components.
- f) A general statement as to the composition of the materials.
- g) Specifications regarding installation requirements as well as sequence of construction:
- h) Noise Reduction Coefficient (NRC) report if the noise barrier is to be considered as sound absorptive; if required by the noise study.
- i) Sound Transmission Class (STC) and/or the material surface density.
- j) Detailed material specifications.
- k) Warranty.

Any new design, material or installation technique for a noise barrier system will be evaluated for acceptability of use in the Region with a view to safety, durability, functionality and cost effectiveness.

The design drawings and calculations shall be signed, sealed and dated by Professional Engineer(s) licensed in the area of expertise for which the approval is being sought.

## 7.2 LIST OF APPROVED SUPPLIERS

Noise Barrier Company	Primary Noise Barrier Material, System, Finish...	Address	Phone Number
Prestige Fence	Steel frame system with wood infill panels (white pine)	163 Cardevco Road R.R. #2 Carp ON K0A 1L0	613-831-2073 and /or 888-676-3325
Central PreCast Inc.	Precast concrete panels with reflective or absorptive finishes	25 Bongard Avenue Nepean ON K2E 6V2	613-225-9510
Alcuf International Inc	Aluminium frame system with a variety of infill panel materials including wood, steel composites and proprietary boards	5350 Canotek Road Unit 20 Gloucester ON K1J 9E2	613-749-9393
International Fence Limited	Precast concrete panels (Vertarib 200) smooth finish or broom finish	541 Piercy Road Bolton ON L7E 5B5	905-951-7337
Durisol	Composite concrete/wood chip panels and steel frames	505 York Blvd., Suite 2 Hamilton ON L8R 3K4	905-521-0999
Homeland Vinyl Fencing Ltd	Composite PVC (Vinyl), wood or steel posts	75 Stafford Drive Brampton, ON L6W 1L3	905-790-3400
Compact Industries	Primarily wood with wood or steel posts	25 Sheffield Street North York ON M6M 3E5	416-249-7921
Roma Fence	Primarily wood with wood or steel posts	24 Cadetta Road Brampton ON L6P 0X4	416-798-7566
Bramalea Fence Limited	Aluminium frame system with a variety of infill panel materials including wood, steel composites and proprietary boards	75 Stafford Drive Brampton ON L6W 1L3	905-453-1373
AIL Sound Walls	Synthetic wall system with absorptive or reflective panels. Optional embossed finish	640 Waydom Drive Ayr ON N0B 1E0	866-231-7867

The Region will periodically review and update this list of approved suppliers of noise barrier systems by Region of York staff. Should a supplier wish to be placed on this list, please contact the Roads Branch of the Transportation Services Department for an opportunity to discuss the proposed barrier system.

## 8.0 INSTALLATION

This section deals with the installation of noise barriers, including design, submission, approval, construction and completion of the contracted work.

The following subsections briefly describe the minimum required data, and specifications, to be completed by the proponent in order to obtain approval from the Region:

## **9.0 SUBMITTALS**

The following documents shall be submitted to the Region for approval for each noise barrier wall project:

- a) Shop drawings, signed and sealed by a qualified Professional Engineer licensed by the Professional Engineers of Ontario, showing the details of noise barrier system components, including material specifications.
- b) Structural drawing(s), signed and sealed by a qualified Professional Engineer licensed by the Professional Engineers of Ontario, showing foundation details and specifying design criteria, climatic design loads, as well as applicable geotechnical data used in the design.
- c) Layout plan, and wall elevations, showing proposed colours and patterns.
- d) A covering letter stating deviations or exceptions to the Region Standard and the reasons/justification for the deviations.

## **10.0 SITE PREPARATION AND GRADING**

To be completed by the proponent.

## **11.0 FOUNDATIONS**

To be completed by the proponent.

## **12.0 DELIVERY, HANDLING, STORAGE AND PROTECTION**

To be completed by the proponent.

## **13.0 ERCTION / INSTALLATION OF NOISE BARRIER**

To be completed by the proponent.

## **14.0 CLEAN UP**

To be completed by the proponent.

## **15.0 TESTING, INSPECTION AND QUALITY ASSURANCE**

To be completed by the proponent.

## **16.0 INITIAL CERTIFICATION AND PERFORMANCE ACCEPTANCE**

An Initial Certification by the proponent's Project Engineer to be prepared and submitted to the Region following completion of the project.




## **17.0 GUARANTEE AND MAINTENANCE PERIOD**




- The noise barrier system (material and installation) to be guaranteed for a minimum period of five (5) years from the date of the initial Certification and Performance Acceptance. A Letter of Credit in the amount of 15% of the sound barrier total cost shall be deposited with the Region to cover the warranty.




- After 3 years from Certification, an inspection is to be carried out by the proponent's Engineer with a report to be submitted to the Region. Any components which exhibit defects that are likely to affect the longevity of the barrier shall be replaced and/or repaired.
- To obtain release of the noted Letter of Credit, a final un-conditional warranty inspection shall be prepared by the proponent's Engineer after five (5) years from the date of original Initial Certification and Performance Acceptance of the barrier to certify that there are no deficiencies of any component of the barrier system; examples include grading, berm, posts, panels and soil condition.

**Standard Operation Procedures Supplement Document:**  
**Scenario Guidelines – Noise Sensitive Uses**  
**(For use with Capital Road Projects Section only)**



N.01	Schools, Churches, Day Cares, Hotels
	<p>The Region does not normally provide mitigation for these uses alone. Although such uses can still be considered noise sensitive due to the incorporation of other indoor spaces that may differ from typical residential living or sleeping quarters in a dwelling unit; these properties shall still be reviewed by the acoustic consultant during the EA to confirm if any OLA's may be associated with any specific habitable uses within these properties.</p> <p>For example, where a property such as an educational institution has functions for housing or lodging accommodations, then an associated outdoor amenity, where provided, should be considered an OLA if the amenity is intended for the quiet enjoyment of the outdoor environment; and meets the full definition of OLA.</p> <p>In such cases, the acoustic consultant shall review and determine if the amenity is intended for use as a quiet space or other recreation/ancillary use. Only after such a review should a recommendation be made to determine if the property is eligible for any mitigation.</p>
N.02	Inhabited or Abandoned Properties
	<p>The Region will continue to study and assess new mitigation for these properties when warranted as part of the EA. The Region will defer the final decision to implement mitigation in these areas based on further review at detailed design and/or construction.</p> <p>The acoustic consultant shall identify in the report all properties that are abandoned or appear to be in an inhabited state; and include a note that implementation of the specific noise barrier will be subject to the approval of York Region.</p> <p>These locations should be reviewed on a case-by-case basis with the Region's Project Manager.</p>
N.03	Modified or Reconstructed Homes
	<p>The acoustic consultant shall consider only the existing building location and outdoor amenity area at the time of preparing the noise study. Any changes to the dwelling or property by the homeowner during the EA and after the site investigations have been completed will not be reconsidered as part of the current study.</p> <p>Additionally, approved site plans (or studies) for other future developments shall be reviewed as part of preparing the EA noise assessment.</p>
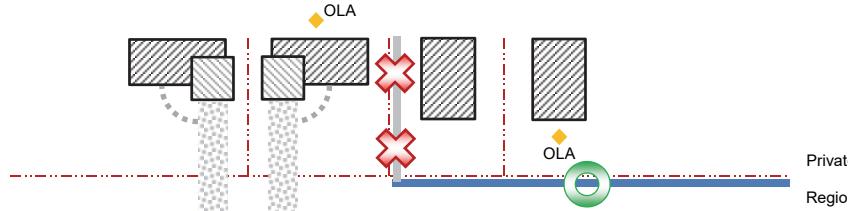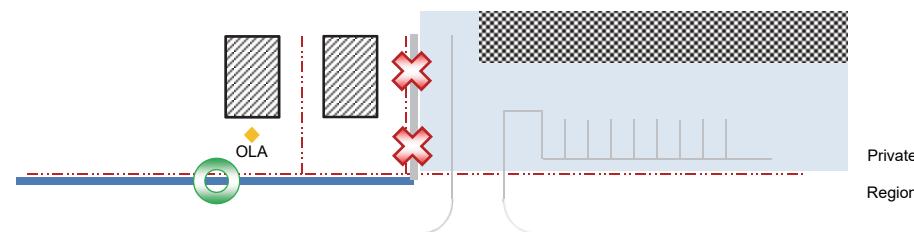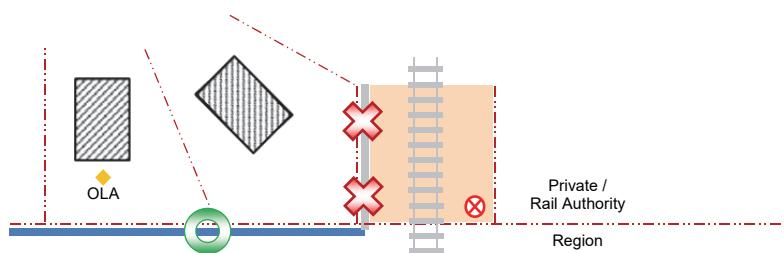
<b>Standard Operation Procedures Supplement Document:</b> <b>Scenario Guidelines – Land Compatibility</b> <b>(For use with Capital Road Projects Section only)</b>		<b>Legend:</b>  <b>Acceptable Noise Barrier Location</b>  <b>Non-approved Noise Barrier Location</b>
<b>L.01</b> Barriers Near Opposing Residential Frontages		<p>The Region will not provide noise barrier fence returns on (or between) private property.</p>  <p>Side returns on residential property are not permitted.</p>
<b>L.02</b> Barriers Near Commercial Areas		<p>The Region will not provide noise barrier fence returns on (or between) private property.</p>  <p>Side returns on commercial property are not permitted.</p>
<b>L.03</b> Barriers Near Rail Corridors		<p>The Region will not provide noise barrier fence returns on (or between) private / rail property.</p>  <p>Side returns on rail property lands are not permitted.</p>

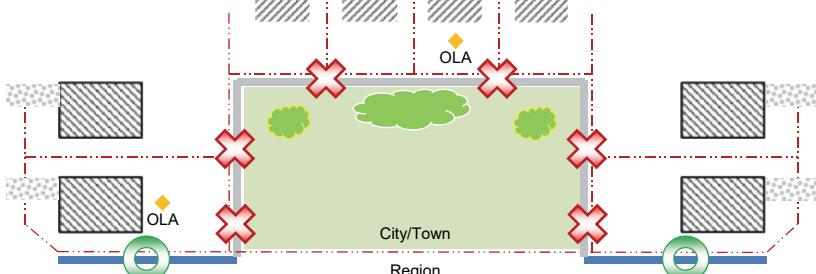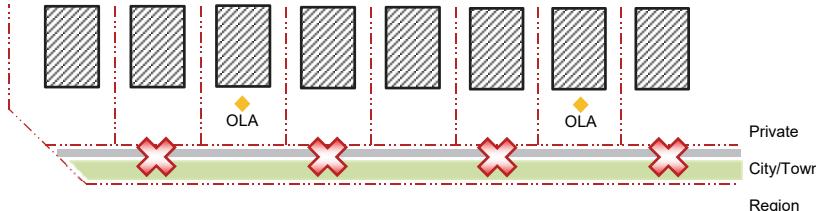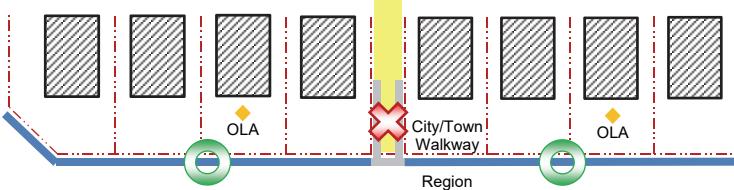
<b>Standard Operation Procedures Supplement Document: Scenario Guidelines – Land Compatibility (For use with Capital Road Projects Section only)</b>	
	<b>Legend:</b>  <b>Acceptable Noise Barrier Location</b>  <b>Non-approved Noise Barrier Location</b>
<b>L.04</b>	<b>Barriers Near Local Parks</b> <p>The Region shall avoid placing noise barrier fences on (or between) private / municipal park property.</p>  <p>Side returns and fences on local municipal park property shall be avoided.</p>
<b>L.05</b>	<b>Barriers Near Other Municipal Landscape Buffers</b> <p>The Region shall avoid placing noise barriers fences on intervening buffer lands that are owned by <u>other</u> public agencies, unless use of the land has been granted for the project.</p>  <p>Noise barriers will not be normally installed on the right-of-way where intervening lands exist. The Consultant shall review in detail and clearly document the ownership of all lands bordering the right-of-way as part of their mitigation recommendations.</p>
<b>L.06</b>	<b>Barriers Near Public Walkways and Accessible Openings</b> <p>The Region will not provide noise barrier fence returns on (or between) private / local municipal property; or obstruct any required opening.</p>  <p>Side returns on local municipal property (e.g. walkways) are not permitted. The Consultant shall review in detail and clearly document any necessary openings along the noise barrier.</p>
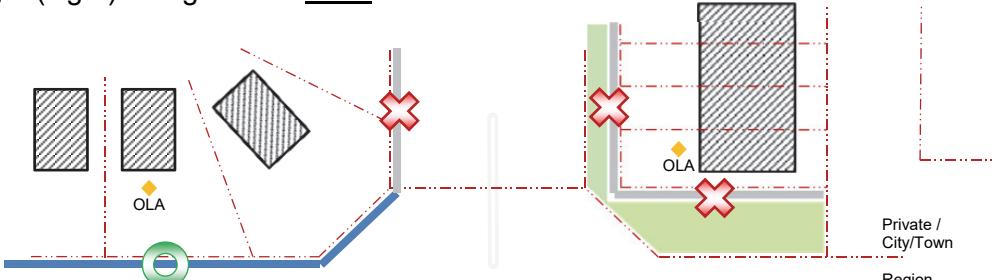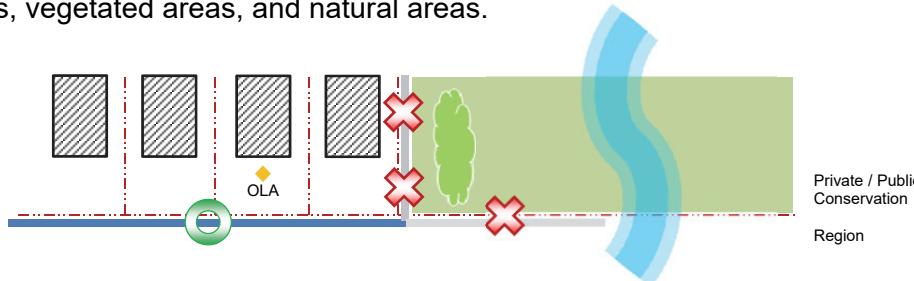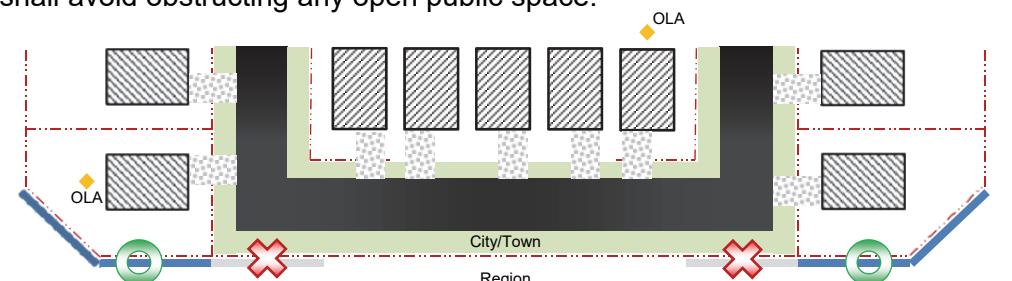
<b>Standard Operation Procedures Supplement Document:</b> <b>Scenario Guidelines – Land Compatibility</b> <b>(For use with Capital Road Projects Section only)</b>		<b>Legend:</b>  <b>Acceptable Noise Barrier Location</b>  <b>Non-approved Noise Barrier Location</b>
<b>L.07</b> Barriers Near Daylight Triangles		<p>The Region shall avoid placing noise fence returns beyond the normal Regional daylight (sight) triangle or on <u>other</u> lands.</p> 
		<p>Noise barriers on lands other than the Region's shall be avoided near daylight triangles. The Consultant shall review in detail and clearly document the ownership of all lands bordering the right-of-way as part of their mitigation recommendations.</p>
<b>L.08</b> Barriers Near Open or Protected Areas		<p>The Region will not provide noise barrier fence returns on (or between) private / open areas; and shall avoid obstructing any open space. These may include areas such as vacant lands, vegetated areas, and natural areas.</p> 
		<p>Noise barriers along or on open lands are not permitted.</p>
<b>L.09</b> Barriers Near Window Streets		<p>The Region will not provide noise barrier fences on (or between) a local municipal road; and shall avoid obstructing any open public space.</p> 
		<p>Noise barriers along adjacent local municipal roads are not permitted.</p>


**Standard Operation Procedures Supplement Document:**  
**Scenario Guidelines – Community Integration**  
**(For use with Capital Road Projects Section only)**

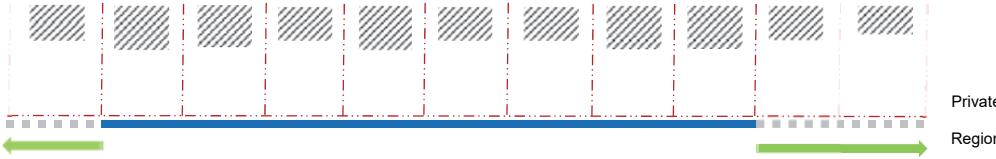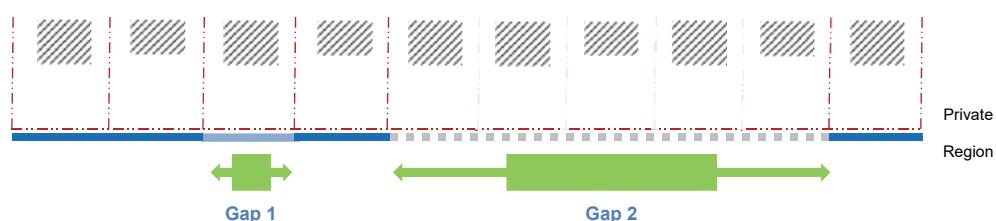C.01	Barrier Extension Across Unwarranted Residential Properties
	<p>This situation describes the outer end treatment of a noise barrier alignment along a row of contiguous homes (excluding frontage properties).</p>  <p>A noise barrier may be permitted to extend behind a warranted property (e.g. meeting criteria), over to behind a neighbouring property that does not warrant mitigation (e.g. below criteria), in order to meet the required barrier effectiveness (e.g. minimum 6 dB) at the warranted location(s). The extended length (e.g. extra barrier section needed) should be designed in a local context sensitive manner.</p> <p>Where the situation may exist, the consultant should provide details supporting the extensions along with any context sensitive design considerations.</p> <p>These locations should be reviewed on a case-by-case basis with the Region's Project Manager.</p>
C.02	Barrier Infilled Across Unwarranted/Ineffective Residential Properties
	<p>This situation describes the middle (or inner) treatment of a noise barrier alignment along a row of contiguous homes (excluding frontage properties).</p>  <p>In such situations, a practical solution is preferred where small or sporadic gaps along a barrier would be undesirable due to adversely affecting the overall effectiveness of the noise barrier. However, due to varying local conditions, the Consultant shall review the barrier design in a local context sensitive manner.</p> <p>A noise barrier may be permitted to be infilled between discontinuous warranted properties (e.g. meeting criteria), and cover one or more inner properties that do not warrant mitigation (e.g. below criteria); or cover inner properties that are partially mitigated (e.g. effectiveness less than 6 dB).</p> <p>The evaluation between providing an infilled noise barrier or segmenting the noise barrier should be reviewed in a local context sensitive manner. The Consultant should</p>

**Standard Operation Procedures Supplement Document:**  
**Scenario Guidelines – Community Integration**  
**(For use with Capital Road Projects Section only)**

	<p>provide a clear and preferred recommendation for either infilling the noise barrier or segmenting the noise barrier, and weigh the design alternatives (acoustically and non-acoustically).</p> <p>Where the situation may exist, the consultant should provide details supporting the infilled or segmented sections along with any context sensitive design considerations.</p> <p>These locations should be reviewed on a case-by-case basis with the Region's Project Manager.</p>
C.03	<p><b>Subdivision Entrance/Architectural Features</b></p> <p>Regional noise barriers should be designed to be context sensitive with existing entrance features that may require modification as a result of integrating the Region's noise barrier design. Noise mitigation should be designed to be effective while efforts should be made to preserve the original subdivision design or gateway feature. In constrained areas where the two join, the noise mitigation effectiveness may be reduced.</p> <p>The consultant should identify subdivision entrance features that could be potentially impacted where Regional noise mitigation is proposed.</p>
C.04	<p><b>Existing Private Retaining Walls</b></p> <p>New noise barriers may be permitted opposite to (e.g. beside) existing private retaining walls where the Regional noise fence can be located at the edge of the Region's right-of-way.</p>  <p>Where mitigation is warranted due to the proposed road works, the evaluation of the noise fence height should be measured on the road-side grade, not including the private retaining wall.</p> <p>The consultant shall clearly identify the proposed noise barrier locations as well as the adjacent existing private retaining wall locations; and identify any potential impacts or construction hurdles (on either side) as part of implementation.</p> <p>The implementation feasibility of constructing the noise barrier should be considered again during detailed design. The construction of noise mitigation may be subject to the implementation feasibility around the surrounding uses.</p>

**Standard Operation Procedures Supplement Document:**  
**Scenario Guidelines – Community Integration**  
**(For use with Capital Road Projects Section only)**

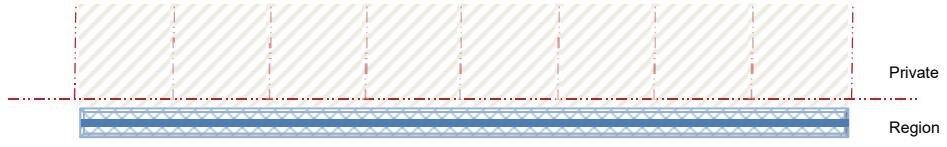C.05	Existing and Proposed Regional Retaining Walls
	<p>New noise barriers may be permitted on Region owned &amp; maintained retaining walls where the Regional noise fence can be located within the Region's right-of-way.</p>  <p>Where mitigation is warranted due to the proposed road works, the evaluation of the noise fence height should be measured from the top of the existing or proposed retaining wall.</p> <p>The feasibility of constructing the overall structure should be considered again during detailed design. The construction of noise mitigation may be subject to the feasibility and/or extent of retrofitting the existing retaining wall and accommodating surrounding uses.</p>



## TRANSPORTATION SERVICES

---

STANDARD DRAWINGS FOR WOODEN NOISE BARRIERS  
ON YORK REGIONAL ROADS


---




# TRANSPORTATION SERVICES

## INDEX

STANDARD NOISE BARRIER LOCATION . . . . .	SHEET A
WOOD NOISE BARRIER ELEVATION - FLAT GRADE INSTALLATION . . . . .	SHEET B1
WOOD NOISE BARRIER ELEVATION - SLOPING GRADE INSTALLATION . . . . .	SHEET B2
POST AND BASE CONSTRUCTION DETAIL . . . . .	SHEET C
POST, RAIL, COPING & CONSTRUCTION FASTENING DETAIL . . . . .	SHEET D
POST AND POST CAPPING DETAIL . . . . .	SHEET E
EXPLODED VIEW - BOARD ON BOARD FASTENING DETAIL . . . . .	SHEET F
MATERIAL AND FINISHING DETAIL . . . . .	SHEET G
AESTHETIC ENHANCEMENTS . . . . .	SHEET H

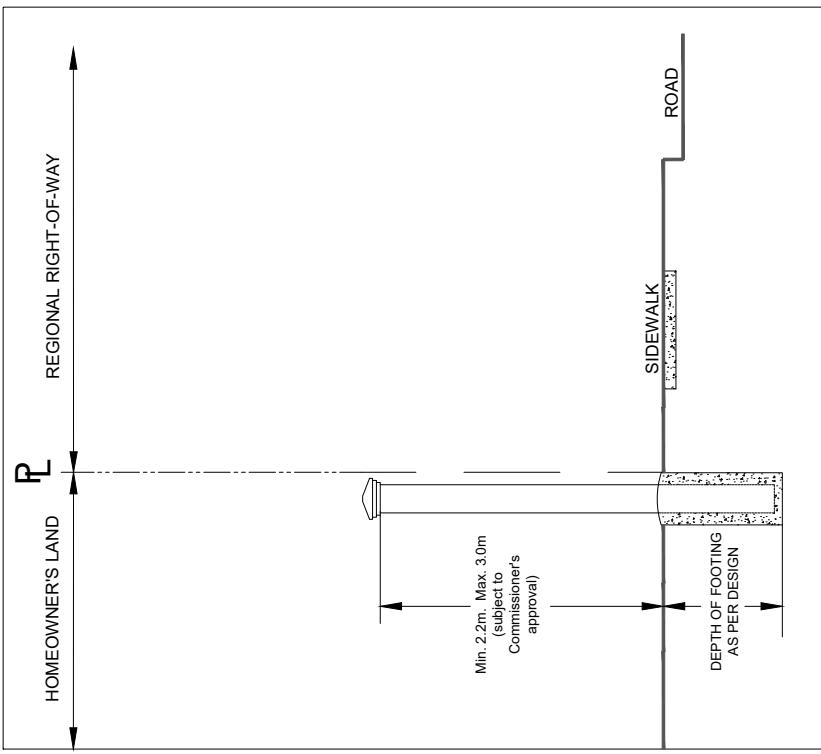


DEVELOPMENT & RETROFIT LOCATION

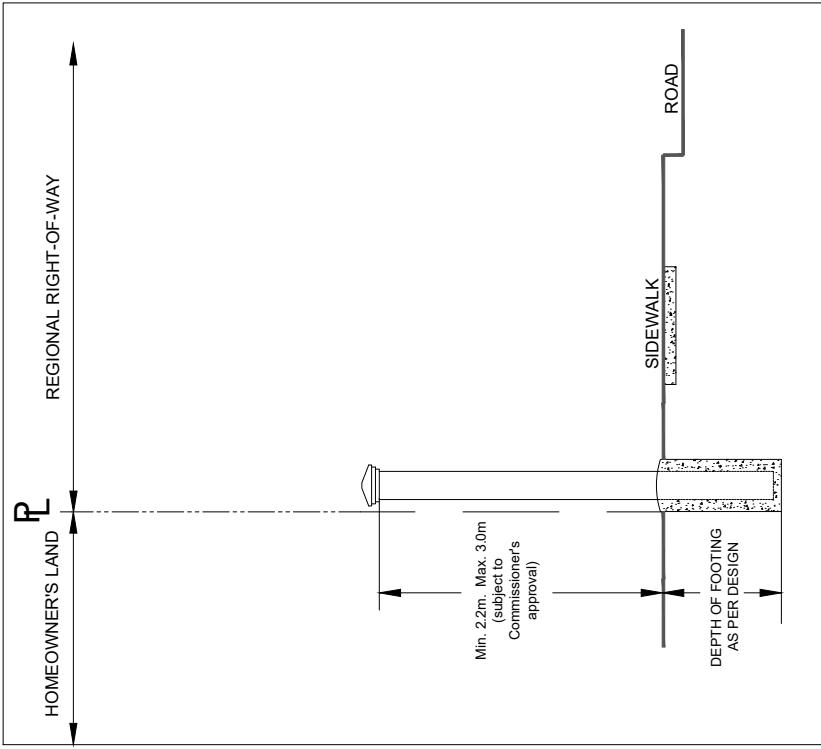

CAPITAL PROGRAM LOCATION

#### DESIGN DETAILS:



1. Barrier materials shall be in accordance with the materials approved by York Region.
2. Boulevard grades to be revised to suit the ultimate edge of pavement grades.
4. Positive drainage must be maintained away from the wall at all times.
5. Structural design (footing and posts) must meet wind pressures as per the Canadian Highway Bridge Design code (latest version) and be stamped by a Professional Engineer.



SHEET A  
STANDARD NOISE BARRIER LOCATION

November 2019  
DATE

FOR FENCE MATERIAL AND  
FINISHING TREATMENTS REFER  
TO SHEET G

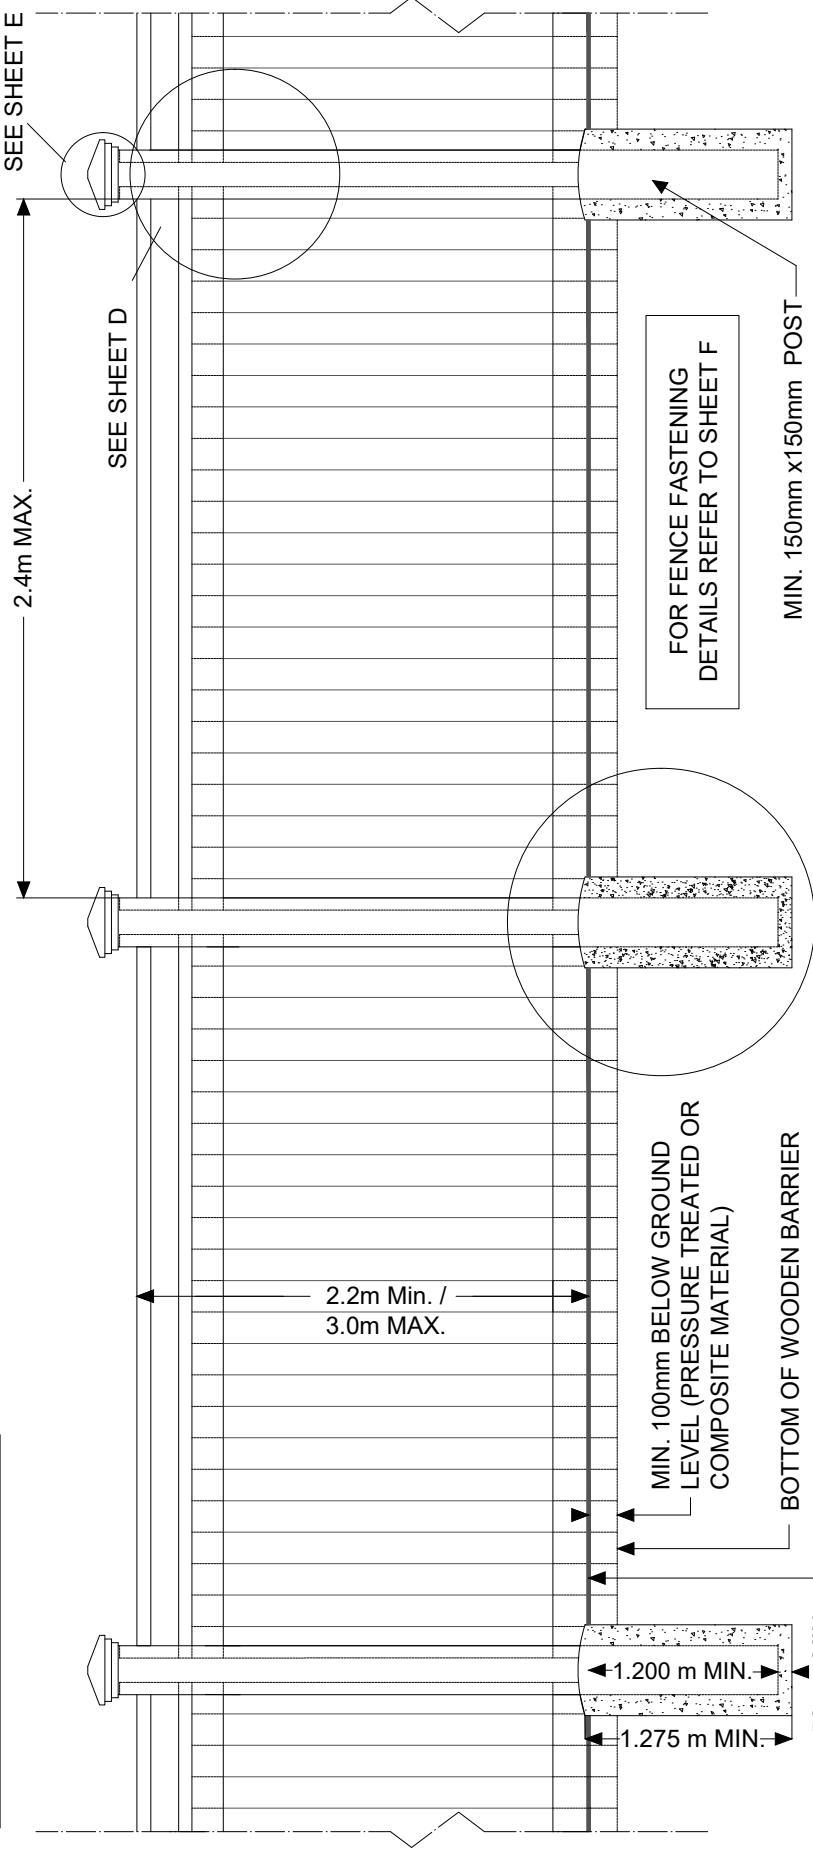

Notes:


1. All wood shall be selected for good appearance and be free of defects and large/heavy knots.
2. Barrier materials shall be in accordance with the materials approved by York Region.
3. All torn grain and surface stains shall be eliminated by appropriate surface refinishing.
4. Maximum height of noise barrier is 3.0 metres. (Commissioner of Transportation Services must approve noise attenuation fences over 2.7 metres where deemed appropriate.)
5. Posts shall be plumb within 5mm/m above grade.
6. For fence fastening details refer to sheet F.
7. For fence material and finishing treatments refer to sheet G.
8. For aesthetic treatments, refer to Sheet H.

SHEET B1

WOOD NOISE BARRIER ELEVATION -  
FLAT GRADE INSTALLATION


November 2019

DATE

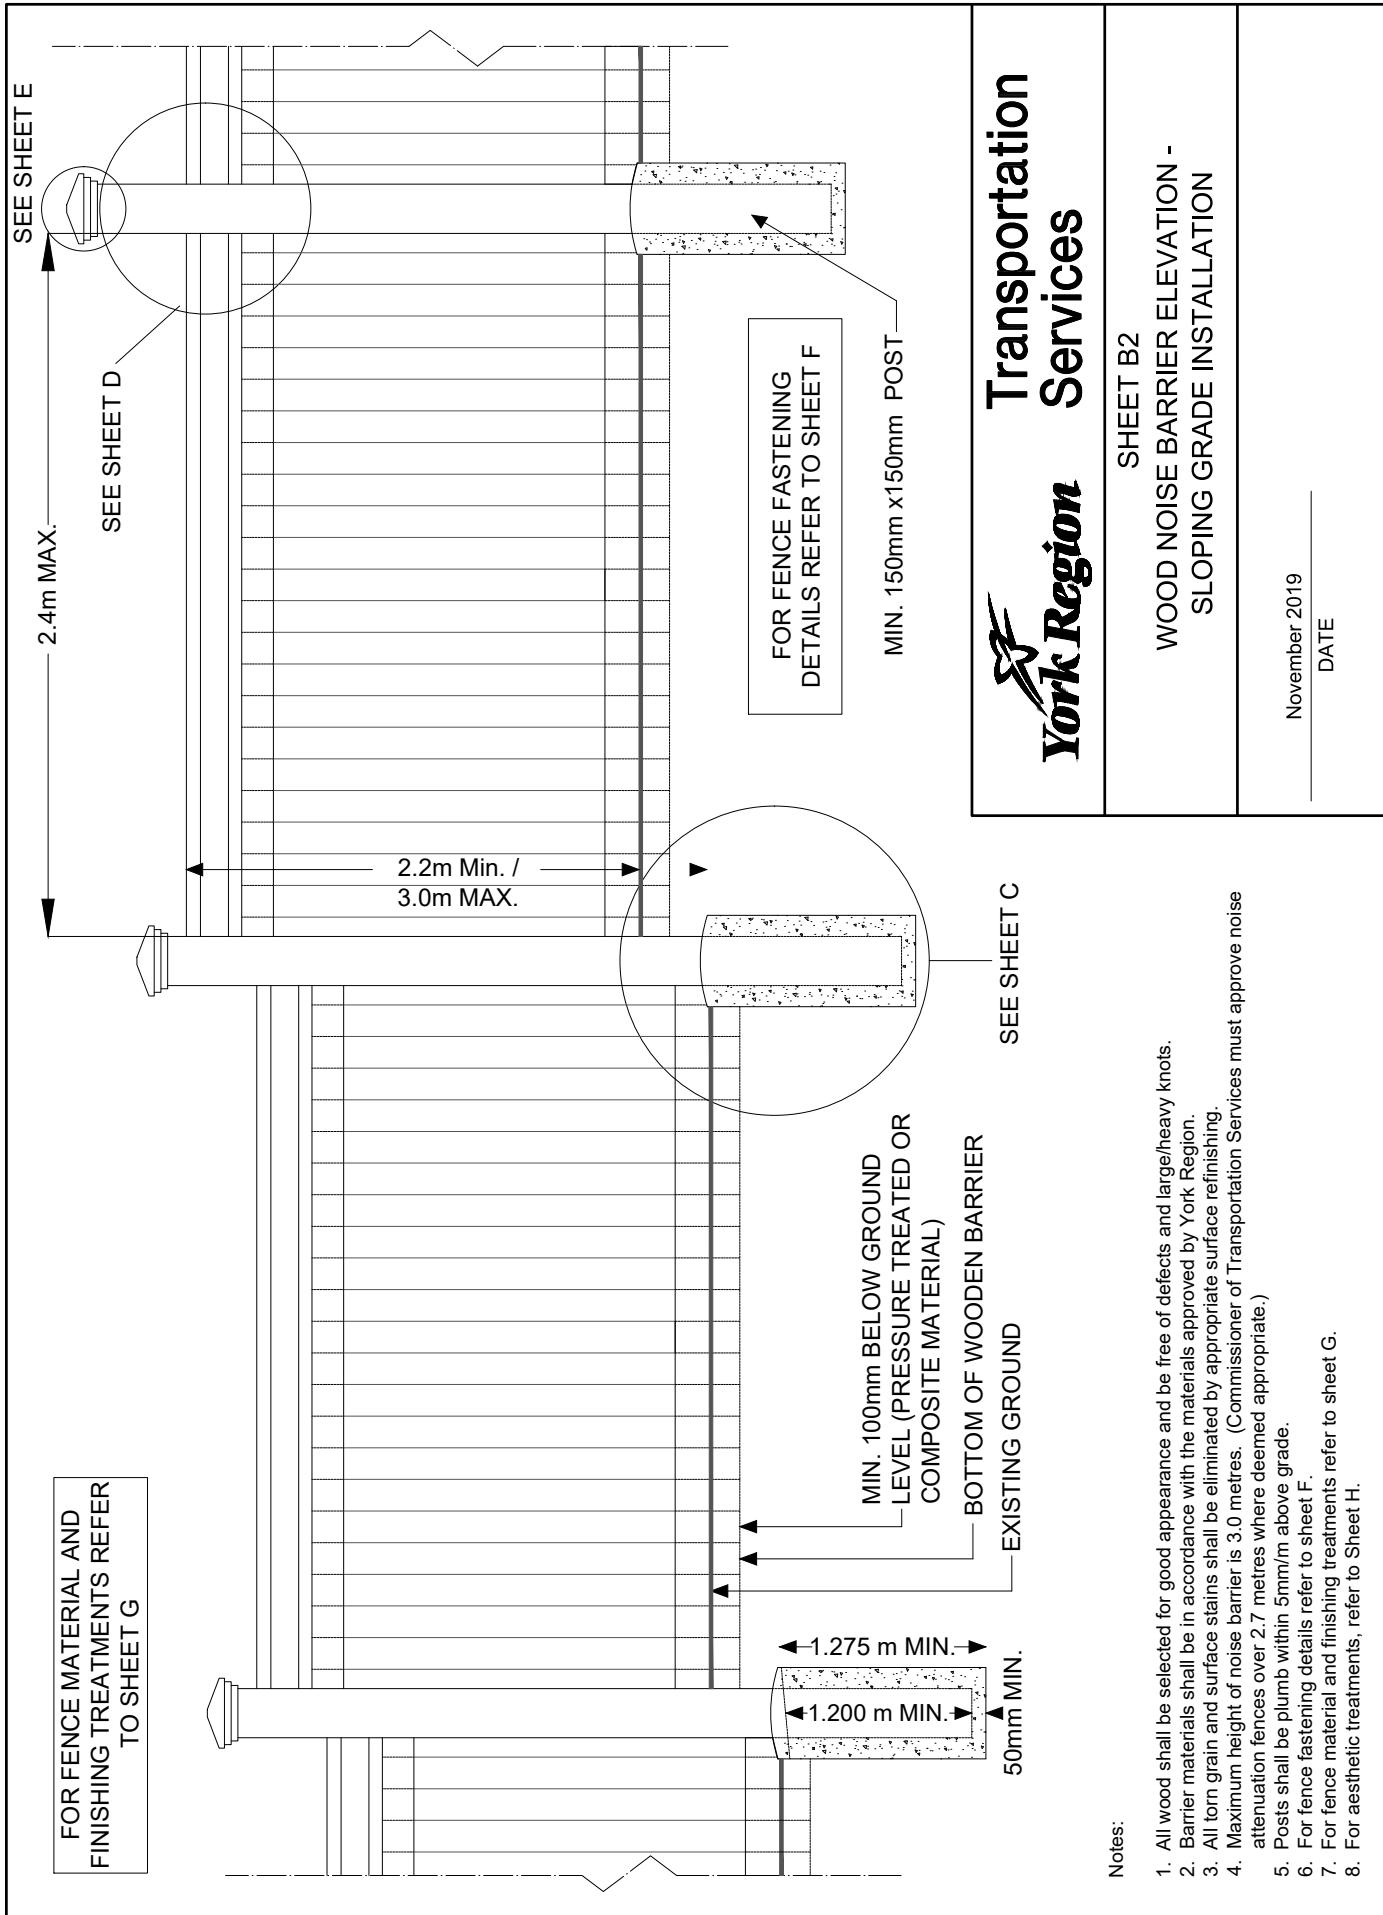

Notes:

1. All wood shall be selected for good appearance and be free of defects and large/heavy knots.
2. Barrier materials shall be in accordance with the materials approved by York Region.
3. All torn grain and surface stains shall be eliminated by appropriate surface refinishing.
4. Maximum height of noise barrier is 3.0 metres. (Commissioner of Transportation Services must approve noise attenuation fences over 2.7 metres where deemed appropriate.)
5. Posts shall be plumb within 5mm/m above grade.
6. For fence fastening details refer to sheet F.
7. For fence material and finishing treatments refer to sheet G.
8. For aesthetic treatments, refer to Sheet H.

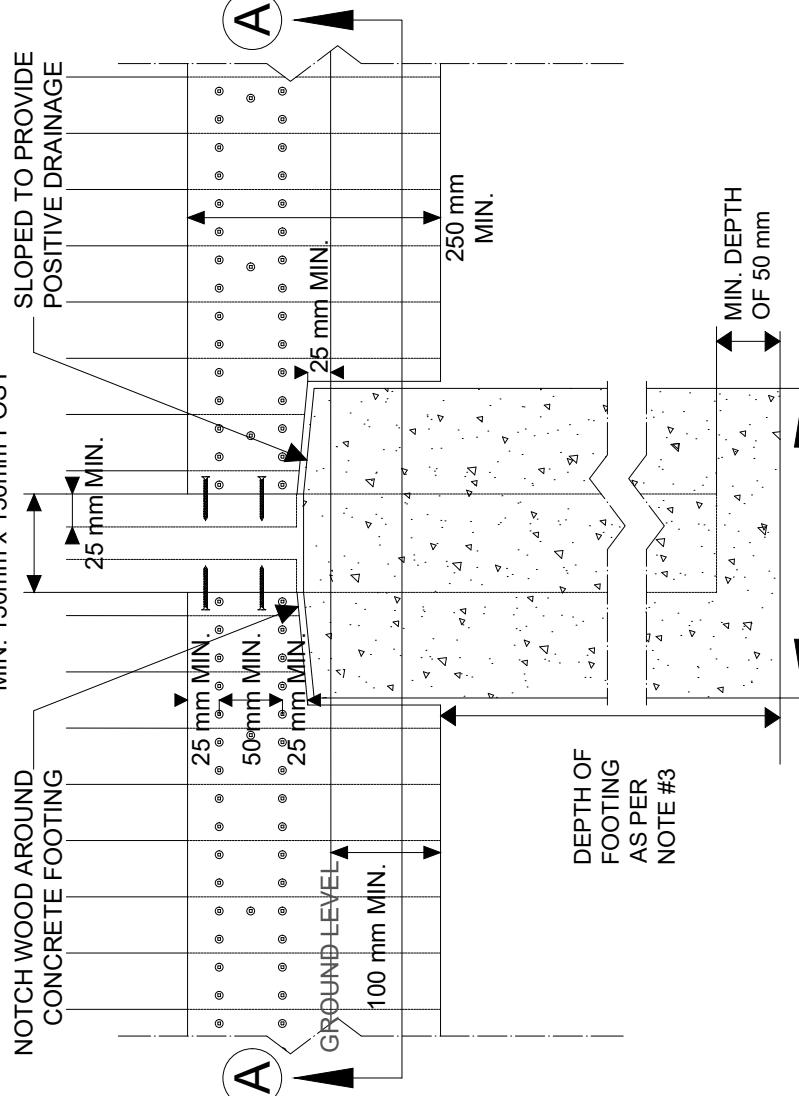

Notes:


1. The pole bases shall be either augered or hand dug if required due to utility constraints.
2. All grassed areas will be reinstated with a minimum of 100 mm good quality imported topsoil and sod.
3. The foundation requirements and the use of Sonotubing shall be designed on a site-specific basis as approved by a Structural Engineer in accordance with the Canadian Highway Bridge Design Code (latest edition). An alternative saddle design system that is made of galvanized steel plate may be considered.
4. All material below finished grade shall be pressure treated or composite material.
5. All earth fill areas to be compacted to 95% maximum dry density or as identified in a soils report if appropriate..
6. All wood to be National Lumber Grading Association (NLGA)
7. All the footing to be founded on undisturbed soil and minimum below freezing depth.
8. All dimensions in millimetres are nominal sizes. Refer to Sheet G for conversion chart

## Transportation Services





SHEET C  
POST AND BASE CONSTRUCTION DETAIL

November 2019  
DATE

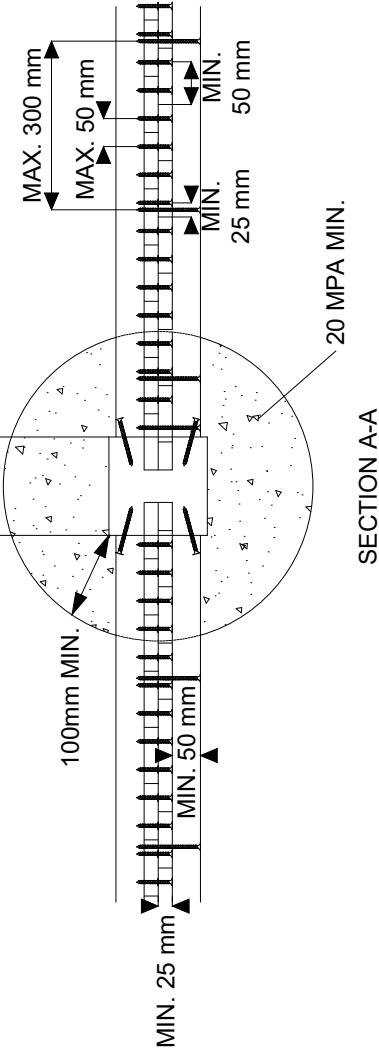


Notes:


1. All bare metal components shall be fabricated of either nonferrous materials or hot dip galvanized as per CSA Standards.
2. All rails to be fastened by minimum screw arrangement shown on Sheet F. Board and post thickness to be chosen based upon density criteria. Refer to Sheet G.
3. Nail Guns may be used when appropriate.

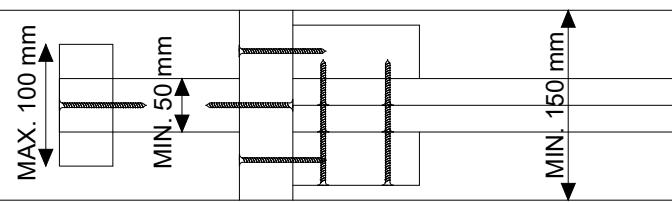


SECTION B-B

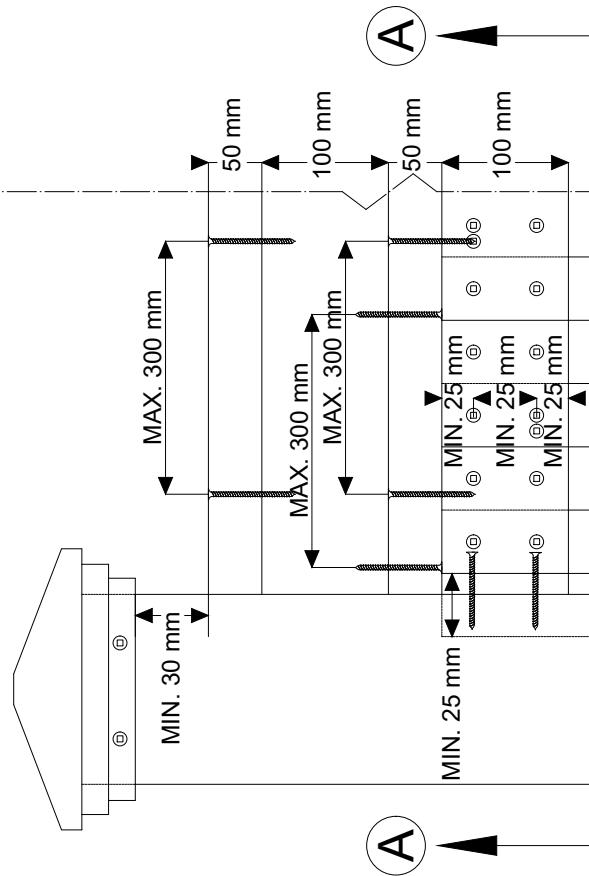


SECTION A-A

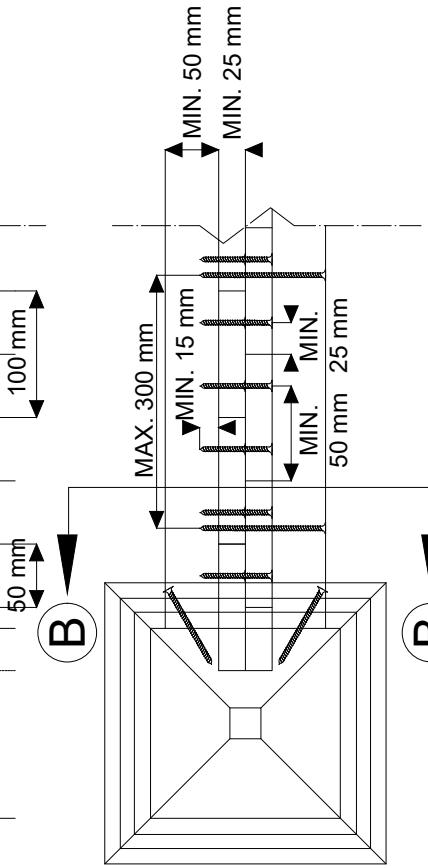


SECTION A-A

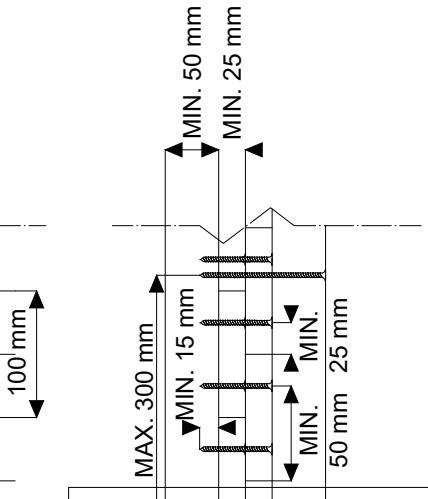


SECTION B-B

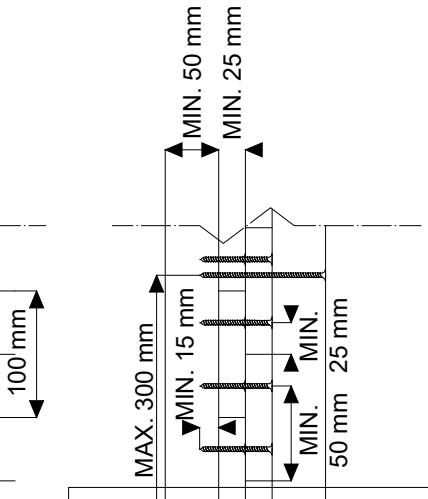


SECTION B-B

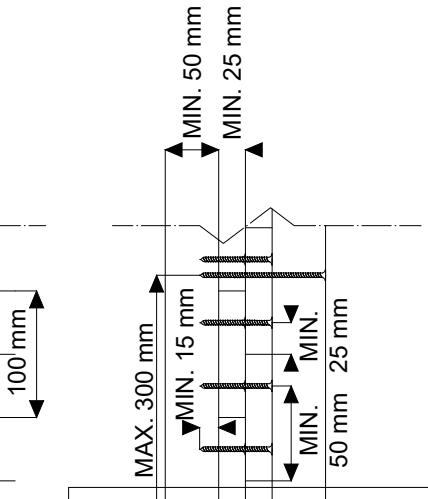


SECTION B-B

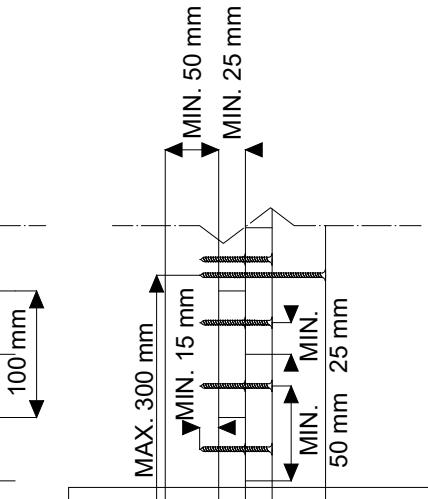


SECTION B-B

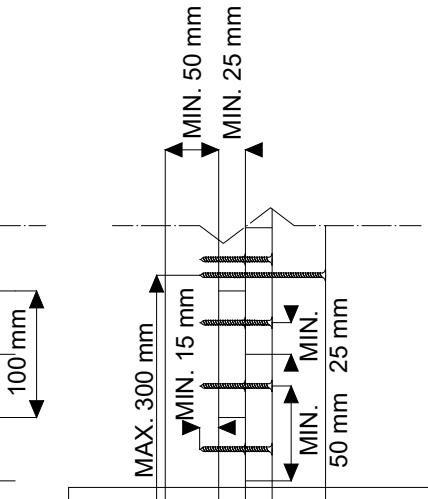


SECTION B-B

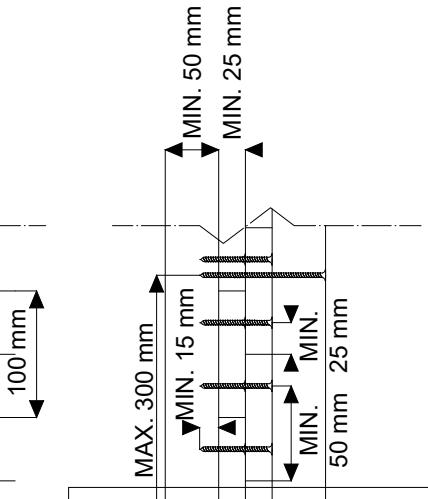


SECTION B-B

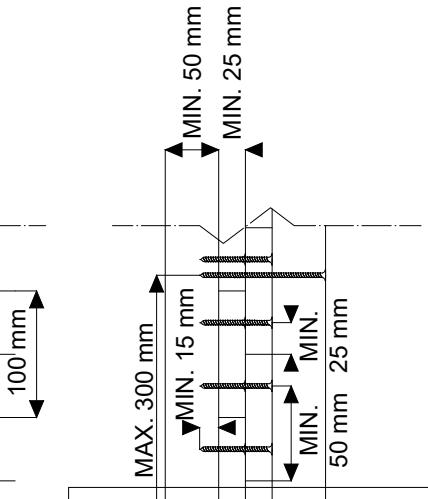


SECTION B-B

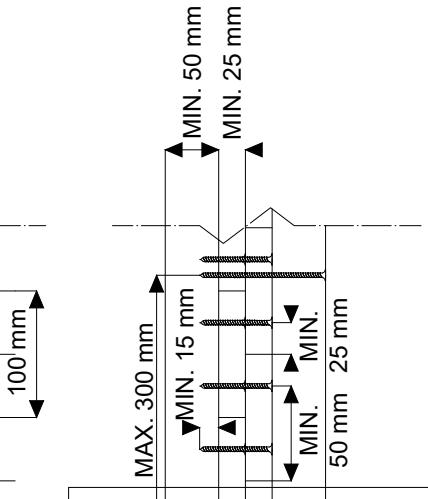


SECTION B-B

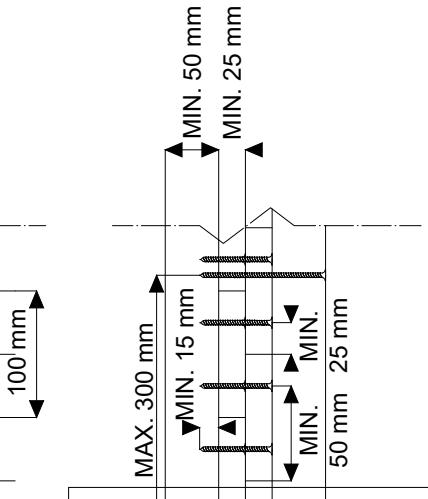


SECTION B-B

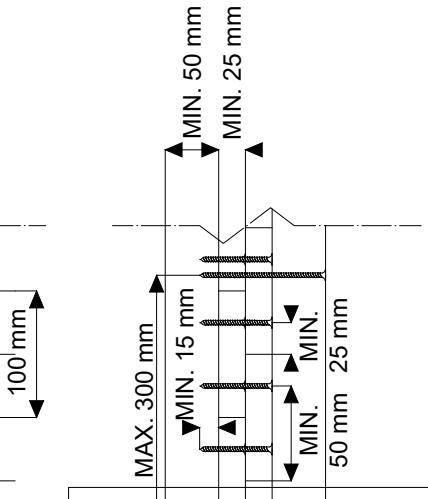


SECTION B-B

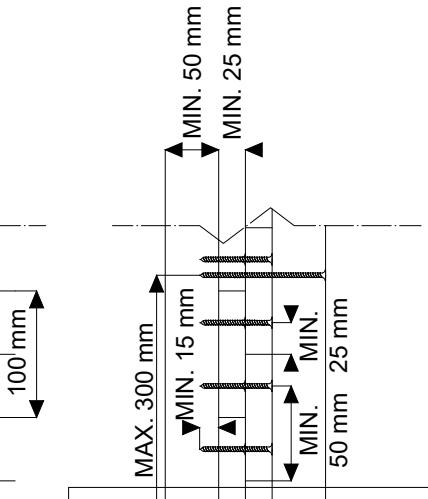


SECTION B-B

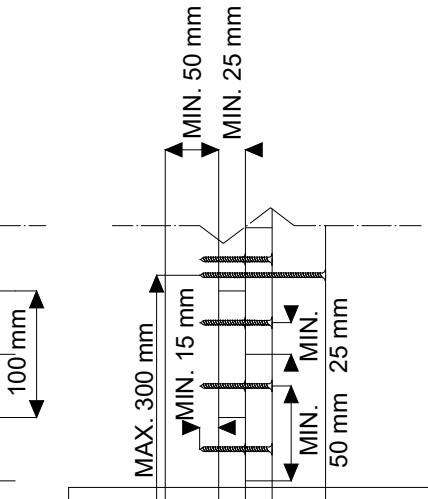


SECTION B-B

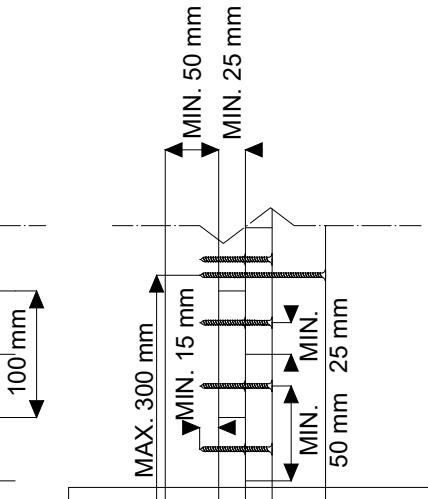


SECTION B-B

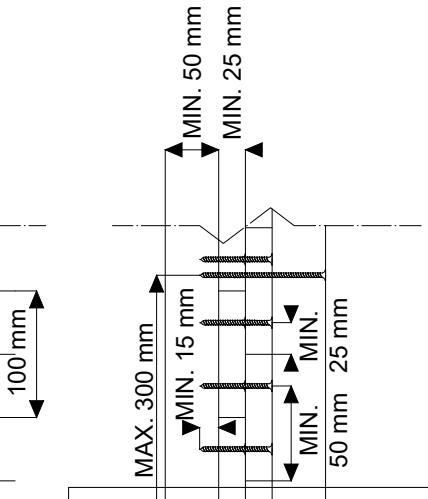


SECTION B-B

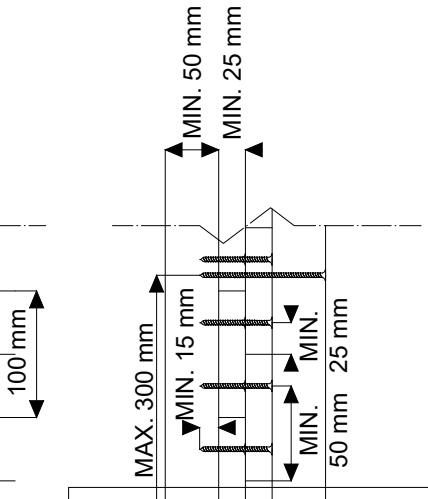


SECTION B-B

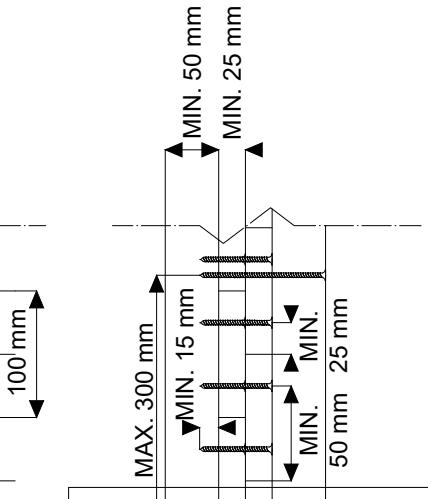


SECTION B-B

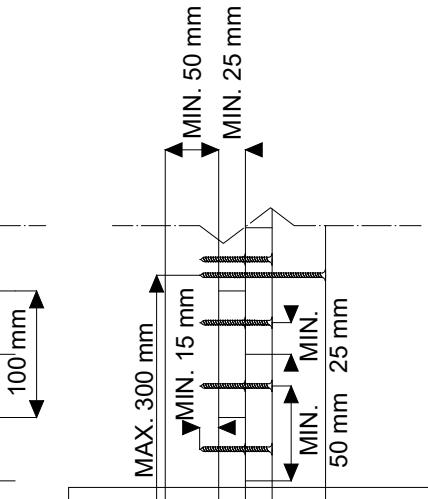


SECTION B-B

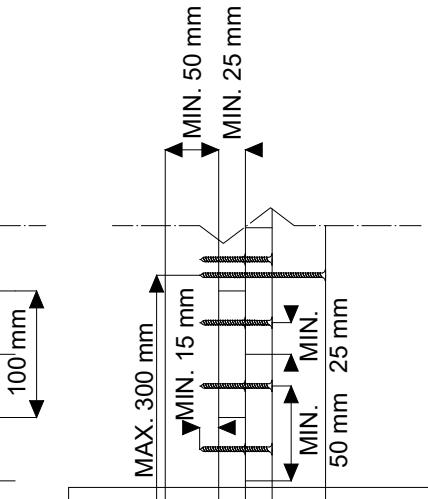


SECTION B-B

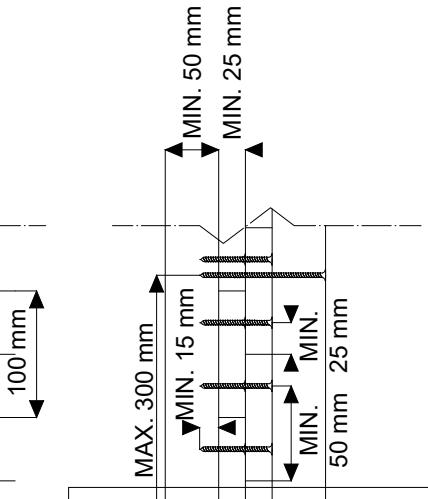


SECTION B-B

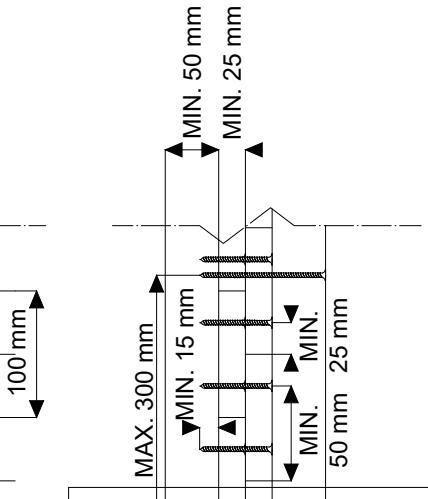


SECTION B-B

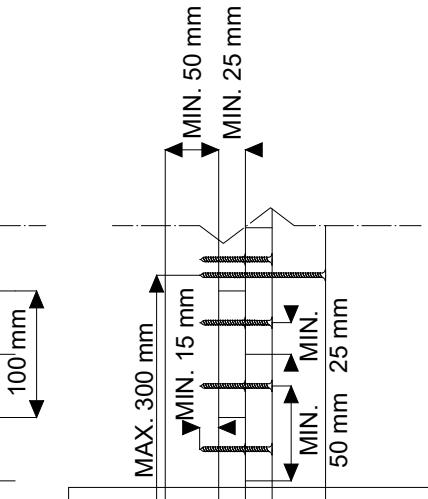


SECTION B-B

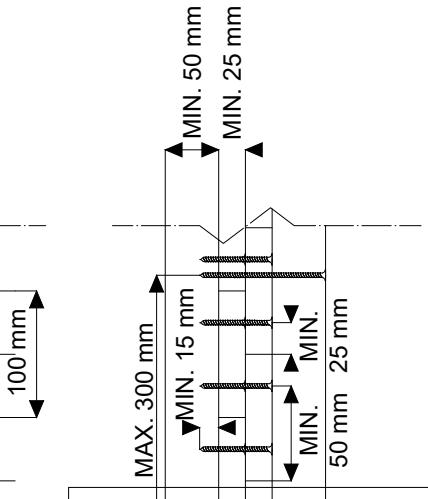


SECTION B-B

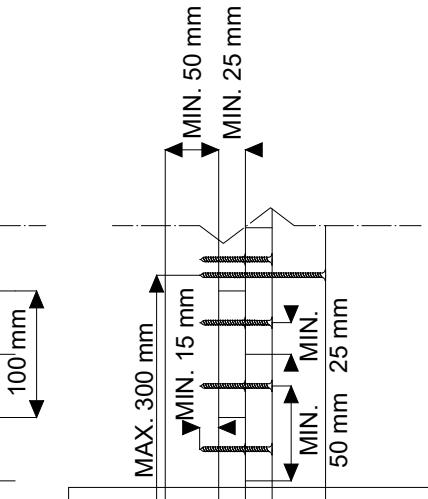


SECTION B-B

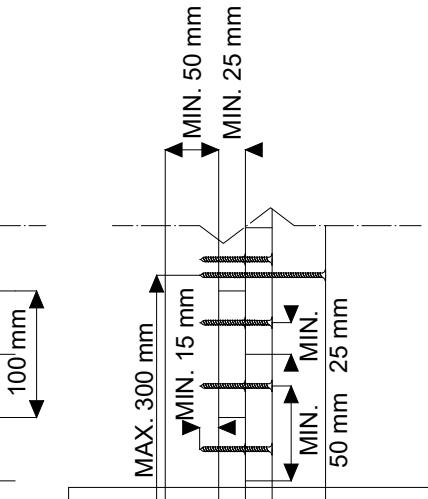


SECTION B-B

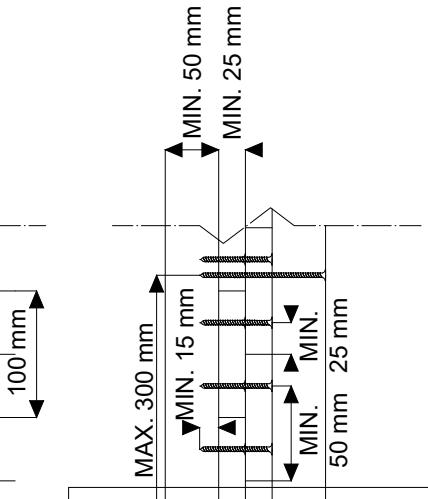


SECTION B-B

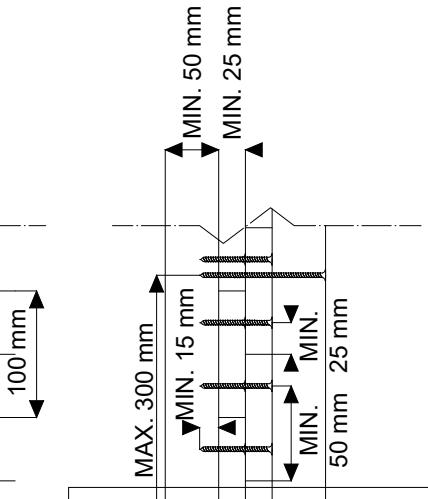


SECTION B-B

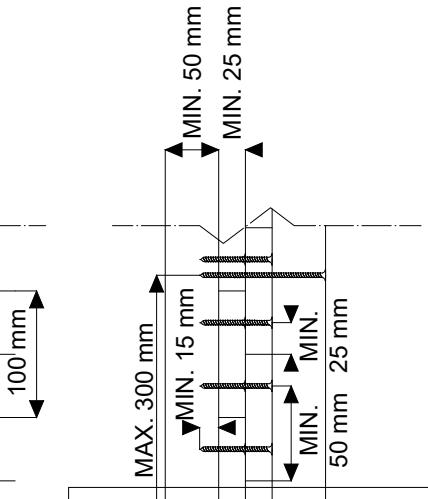


SECTION B-B

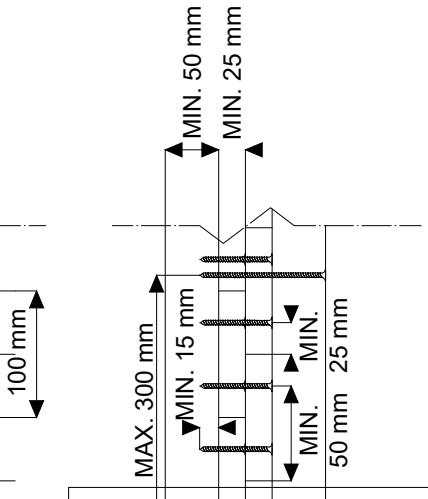


SECTION B-B

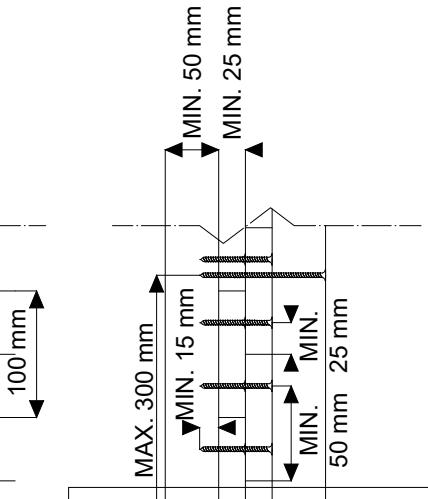


SECTION B-B

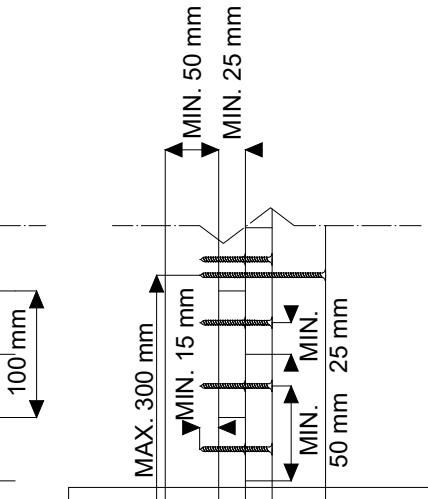


SECTION B-B

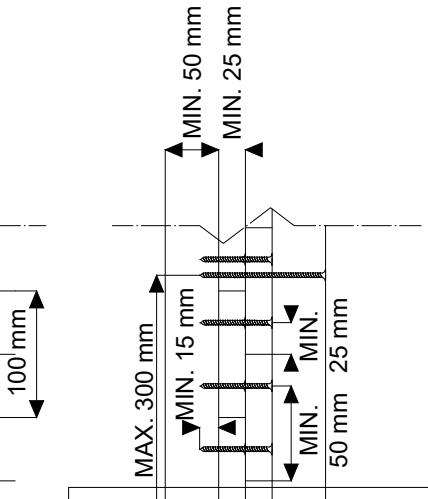


SECTION B-B

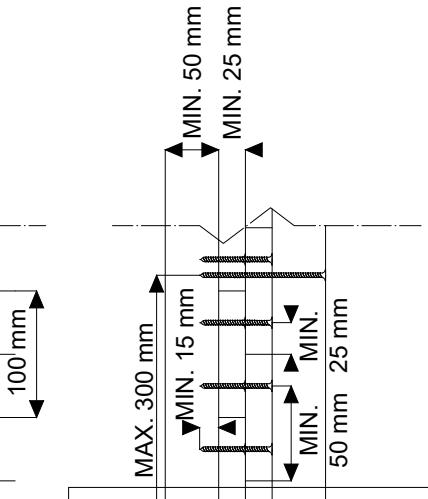


SECTION B-B

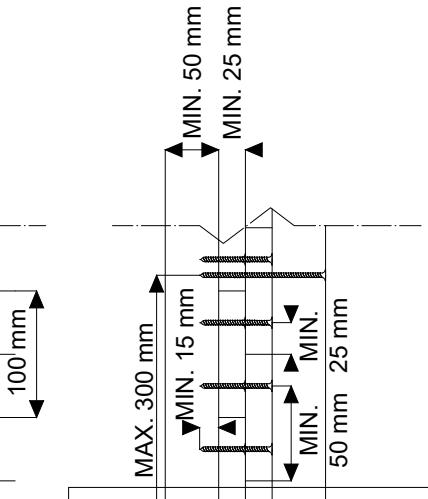


SECTION B-B

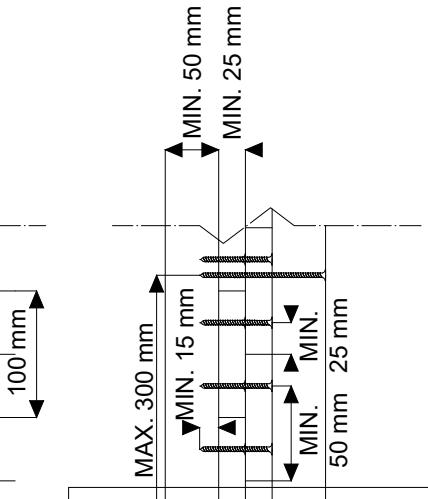


SECTION B-B

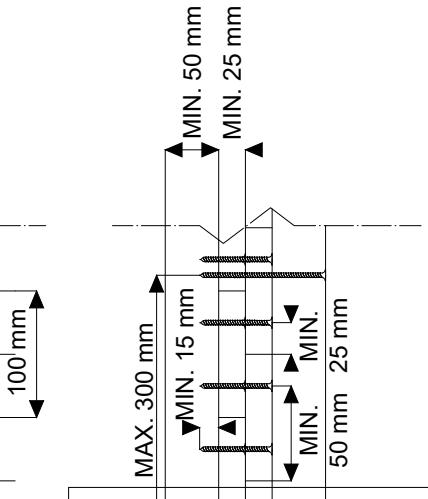


SECTION B-B

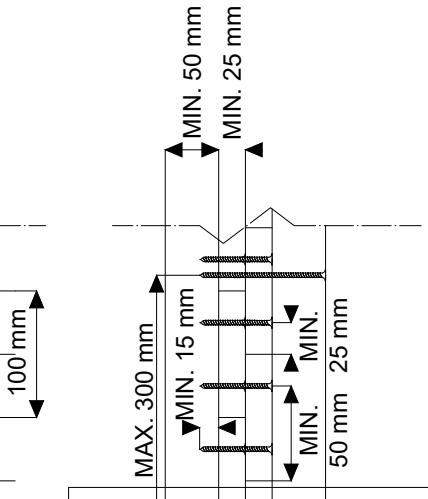


SECTION B-B

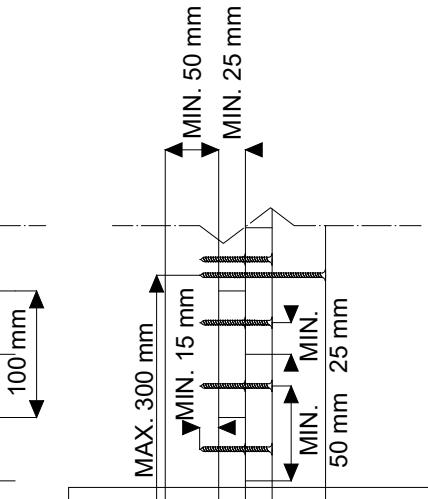


SECTION B-B

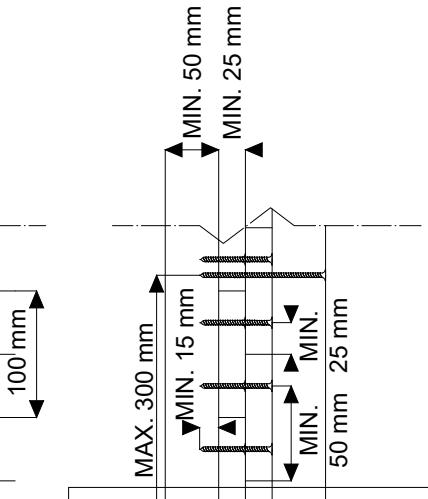


SECTION B-B

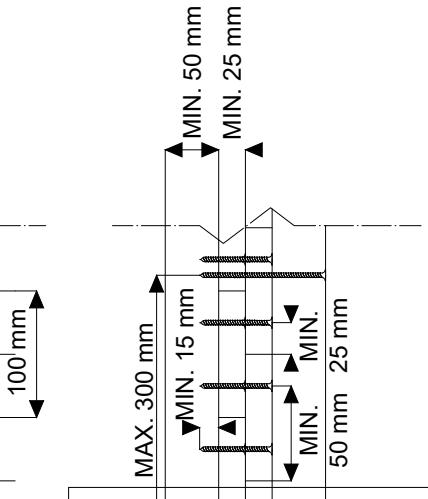


SECTION B-B

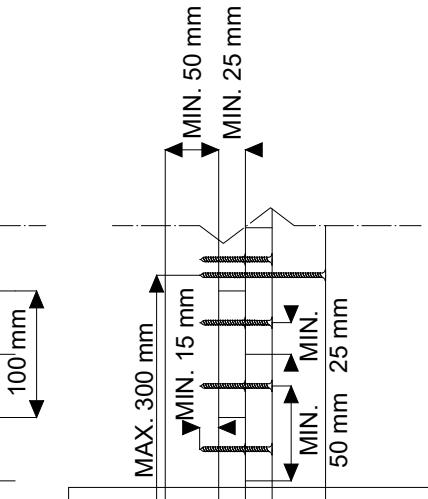


SECTION B-B

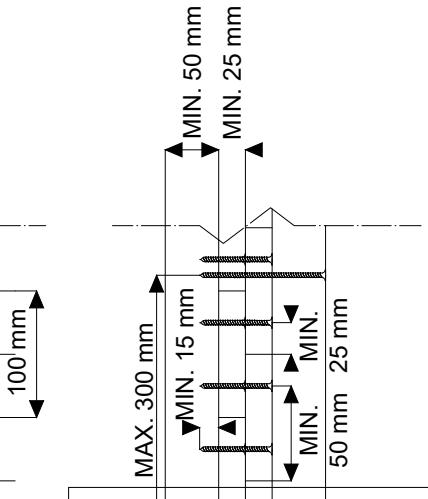


SECTION B-B

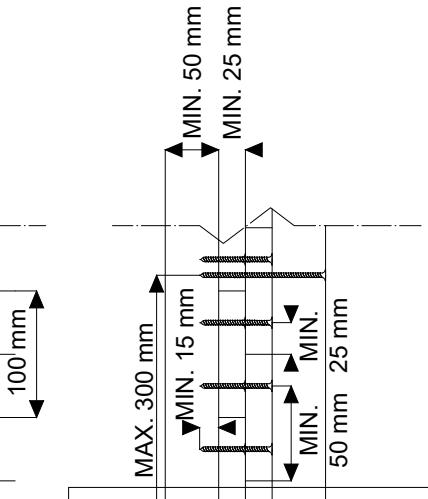


SECTION B-B

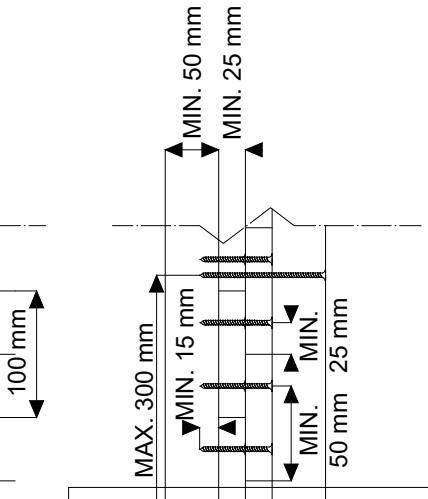


SECTION B-B

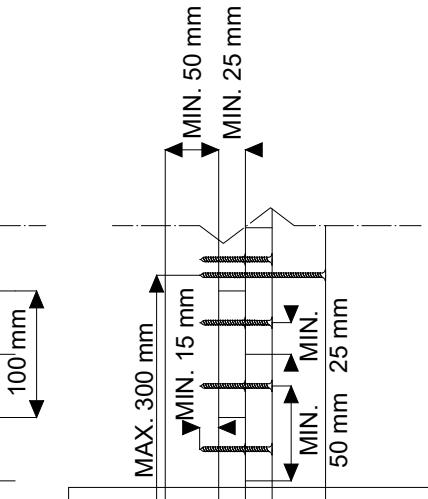


SECTION B-B

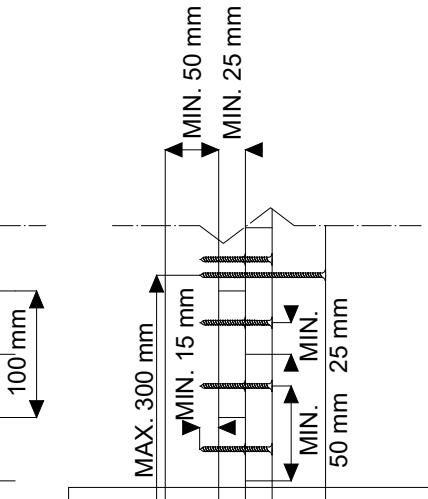


SECTION B-B

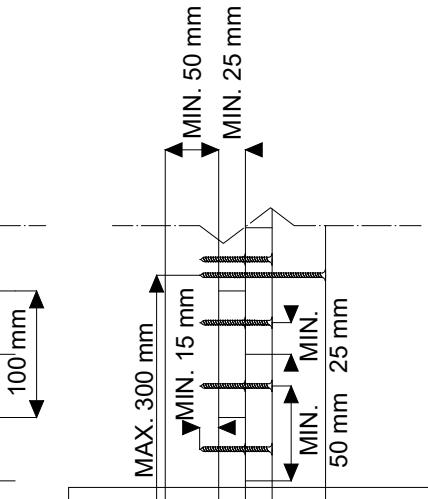


SECTION B-B

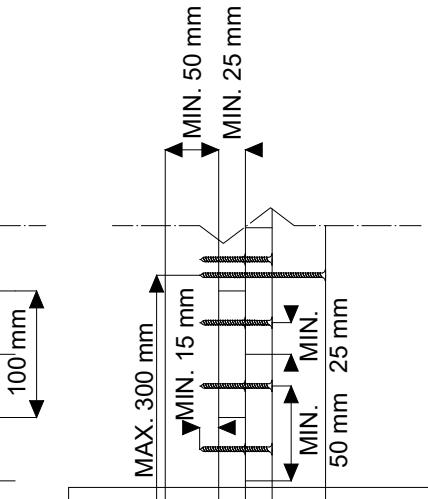


SECTION B-B

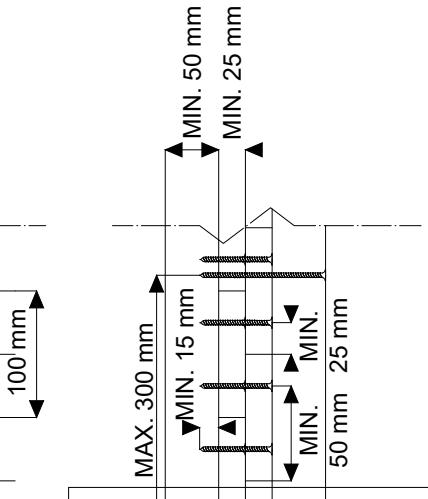


SECTION B-B

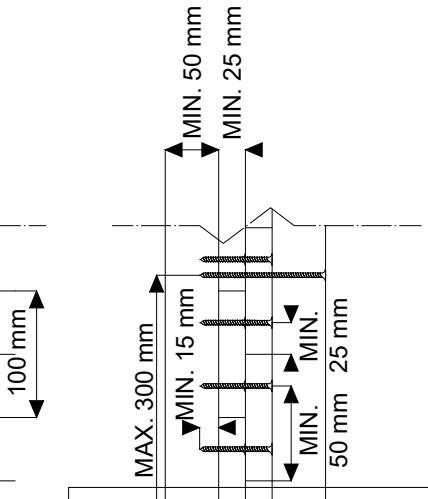


SECTION B-B

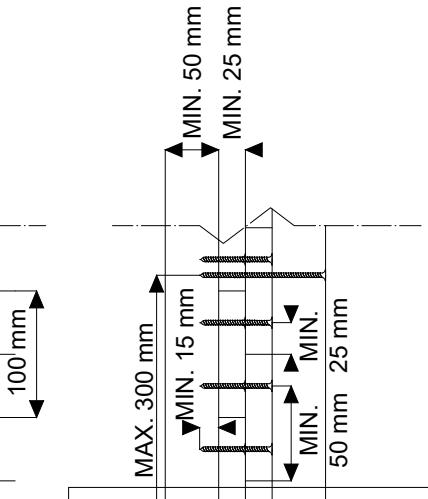


SECTION B-B

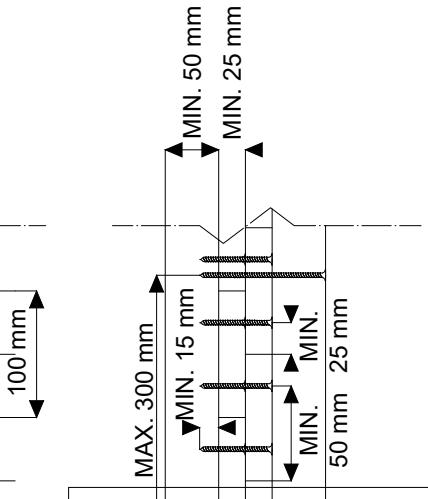


SECTION B-B

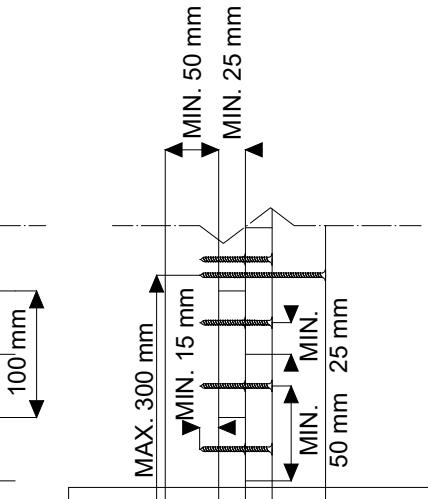


SECTION B-B

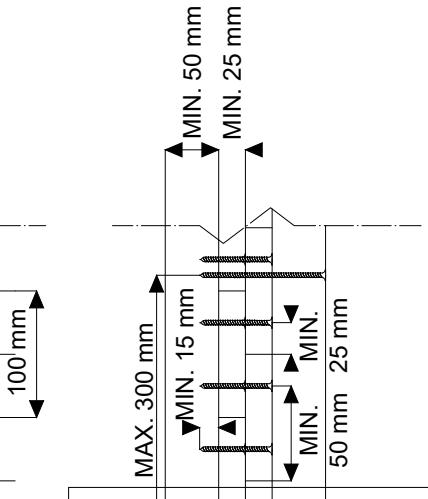


SECTION B-B

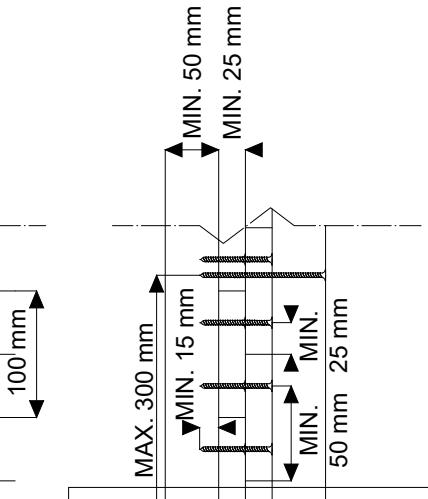


SECTION B-B

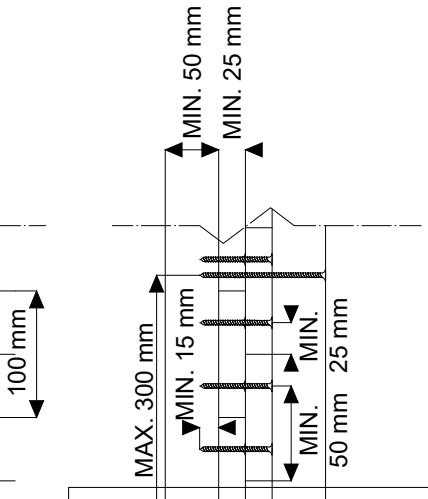


SECTION B-B

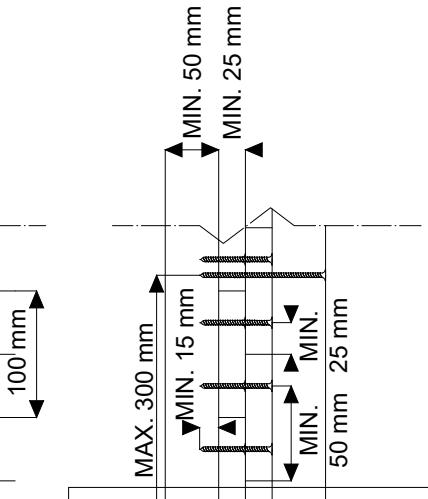


SECTION B-B

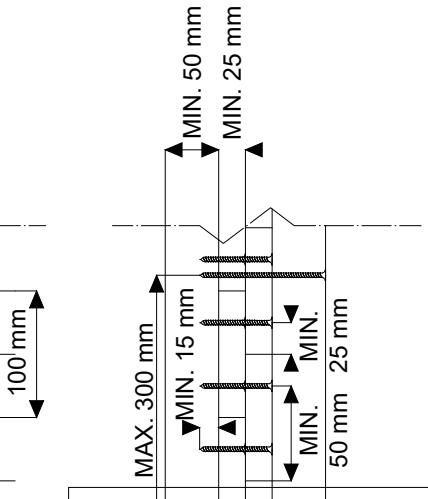


SECTION B-B

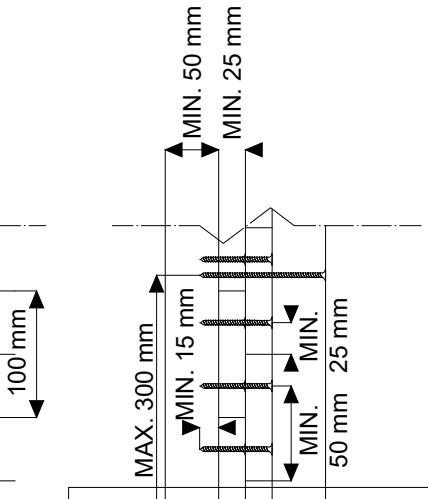


SECTION B-B

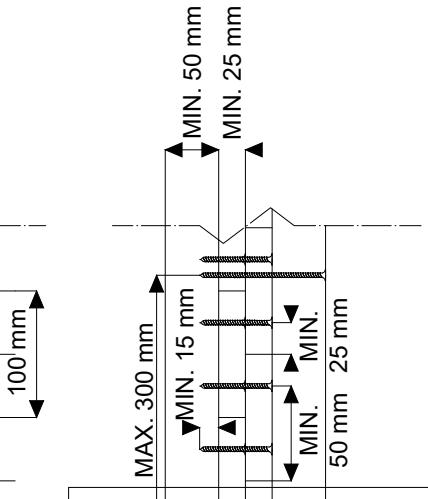


SECTION B-B

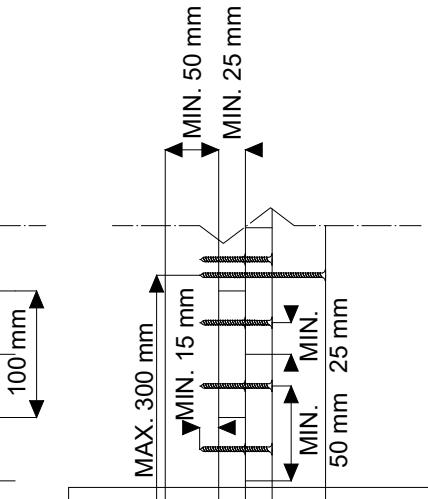


SECTION B-B

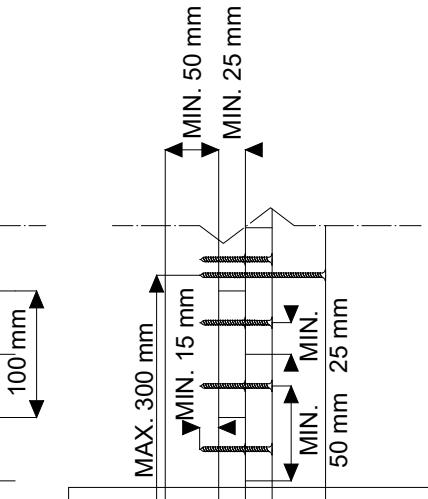


SECTION B-B

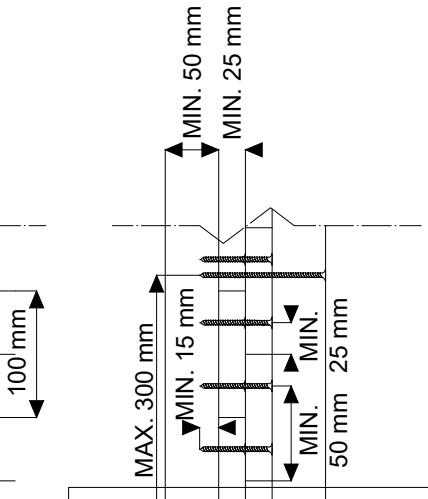


SECTION B-B

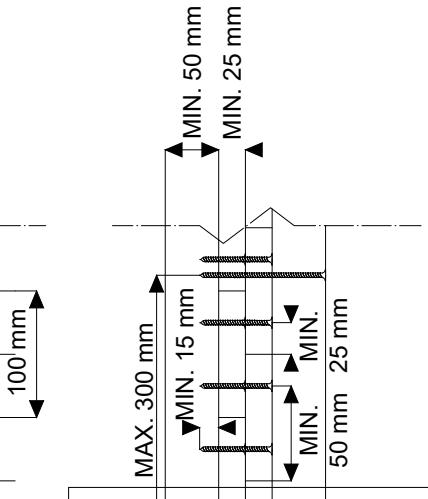


SECTION B-B

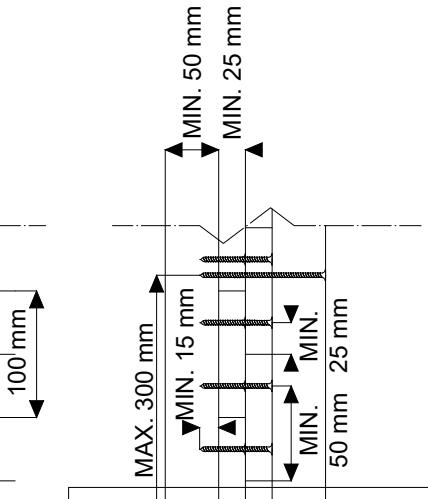





WOOD POST

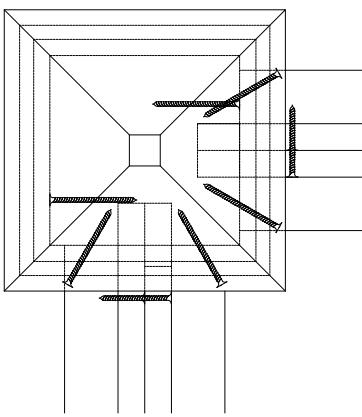


180° POST JOINT  
AND CAP DETAIL

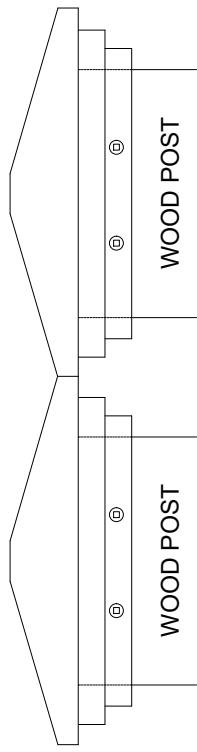


WOOD POST

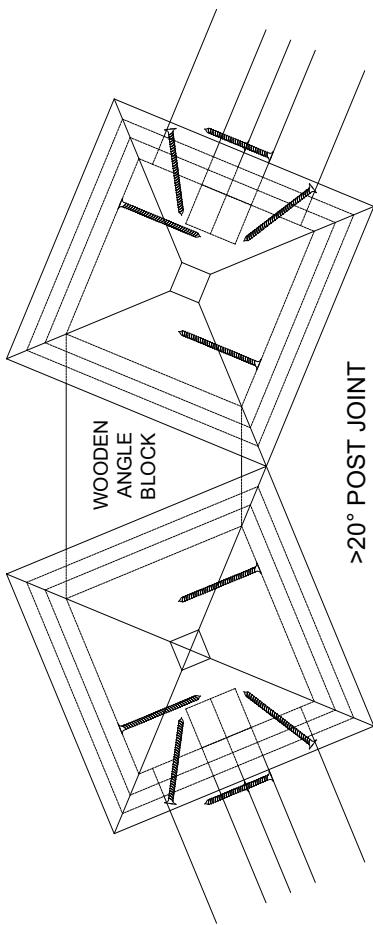

>20° POST JOINT  
AND CAP DETAIL

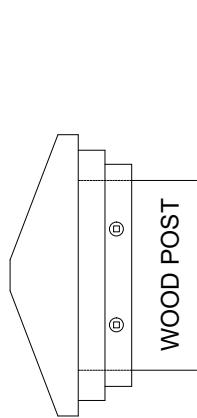

WOOD POST

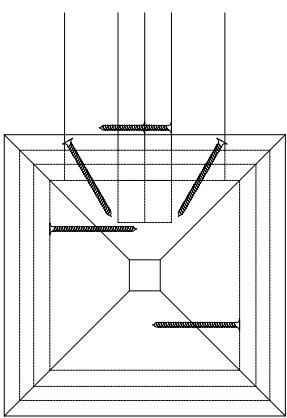

END POST JOINT  
AND CAP DETAIL

## Transportation Services



SHEET E  
POST & POST CAPPING DETAIL


Notes:

- Post Cap materials shall be metal or plastic only and match the finished fence colour and be approved by York Region.
- All caps shall be fastened with 2 screws or nailed, preferably on opposite sides of the post.
- Post cap dimensions vary with post size.

November 2019  
DATE

Notes:

1. After setting posts and allowing concrete to cure, the top and bottom rails on the homeowners side of the fence should be fastened.
2. Screw or nail the vertical rails into place starting with the homeowners side rails; each post shall be notched to allow the rails to terminate inside the post. (Refer to Sheet D)
3. Fasten the Region side top and bottom cross members into place.
4. Attach an approved coping feature to the top rails and cap the post.
5. Backfill the area around the bottom rail ensuring to maintain a buried depth of at least 100mm.
6. All fastener lengths to be determined as per Detail "A" on this drawing.

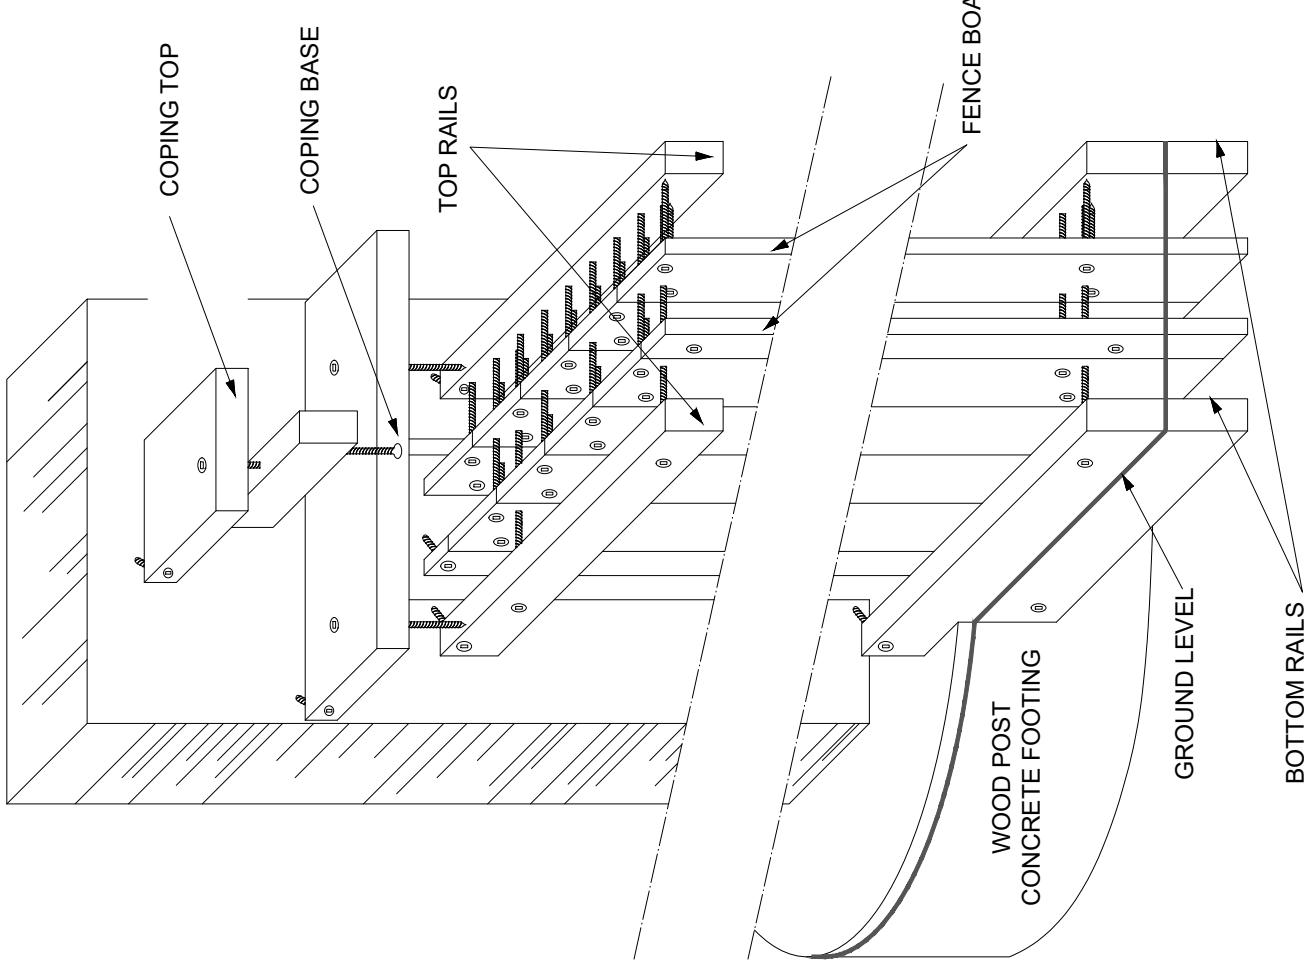

# Transportation Services



SHEET F - EXPLODED VIEW  
BOARD ON BOARD FASTENING DETAIL

November 2019  
DATE

## STAIN FOR WOOD FENCE

### SHALL CONSIST OF:

- A BASE OF BLENDED RESINS AND OILS IN A WATER SUSPENSION
- SUSPENDED SOLIDS WHICH ARE NOT LESS THAN 21% AND NOT GREATER THAN 31% BY VOLUME
- V.O.C.'S (VOLATILE ORGANIC COMPOUNDS) WHICH ARE NOT IN EXCESS OF 3500g/L IN ACCORDANCE WITH A.S.T.M. D-2369
- LEVELS OF LIQUID MICROBICIDES AND ANY OTHER POTENTIAL TOXIC SUBSTANCES WHICH ARE ENVIRONMENTALLY SAFE (NOT REQUIRING PROVINCIAL OR FEDERAL REGISTRATION)
- NONE OF THE FOLLOWING HAZARDOUS SUBSTANCES:
- FOLPET (N-(TRICHLOROMETHYLTHIO) PHTHALIMIDE)
- BIS (TRIBUTYL[TIN] OXIDE
- COPPER NAPHTHENATE
- COPPER & QUINOLINOLATE
- ZINC NAPHTHENATE
- SUFFICIENT OXIDE PIGMENTS TO OBTAIN DESIRED COLOUR TONE AND LEVEL OF OPACITY (COLOUR TO BE APPROVED BY YORK REGION FOR EACH INSTALLATION)

### APPLICATION OF STAIN:

APPLY TWO (2) COATS ON CLEAN DRY WOOD USING SPRAY, BRUSH OR DIPPING METHODS TO ACHIEVE FULL COVERAGE OF ALL EXPOSED SURFACES. APPLY OUTDOORS ONLY IN SUITABLE WEATHER CONDITIONS DURING WHICH THE TEMPERATURE IS BETWEEN 5° C AND 21° C FOR A PERIOD OF 48 HOURS FOLLOWING APPLICATION.

## MINIMUM WOOD BOARD THICKNESS CHART TO OBTAIN 20KG/m<sup>2</sup> SOUND ATTENUATION


SPECIES	ACTUAL WOOD THICKNESS
JACK PINE	2 x 22 mm THICKNESS
RED PINE	2 x 22 mm THICKNESS
PONDEROSA PINE	2 x 22 mm THICKNESS
EASTERN PINE	2 x 22 mm THICKNESS
WESTERN PINE	2 x 25 mm THICKNESS
WESTERN CEDAR	2 x 25 mm THICKNESS
EASTERN CEDAR	2 x 28 mm THICKNESS
NORTHERN WHITE CEDAR	2 x 28 mm THICKNESS
RED SPRUCE	2 x 22 mm THICKNESS
WHITE SPRUCE	2 x 25 mm THICKNESS
SPF	2 x 28 mm THICKNESS

## DIMENSIONAL LUMBER CONVERSION CHART

NOMINAL (mm)	ACTUAL (mm)	NOMINAL (in.)	ACTUAL (in.)
25	19	1	0.75
50	38	2	1.5
100	89	4	3.5
150	140	6	5.5
200	184	8	7.25
250	235	10	9.25
300	286	12	11.25

## Transportation Services

 <b>York Region</b>	<b>Transportation Services</b>	SHEET G
		MATERIAL AND FINISHING DETAIL
		November 2019
		DATE

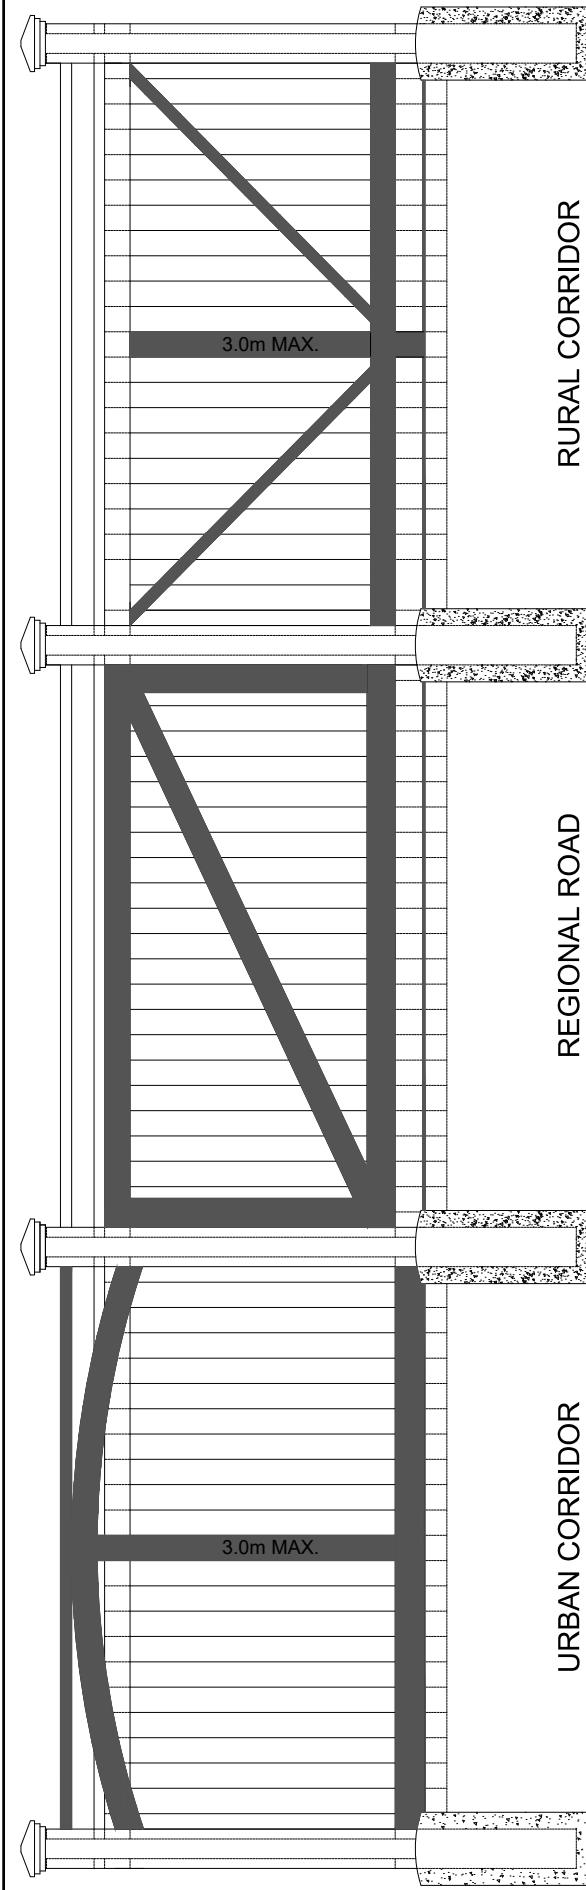

#### IN ORDER TO MEET PROJECT SPECIFIC GOALS, LANDSCAPING PLANS SHALL BE DEVELOPED AS FOLLOWS:

Where noise attenuation barriers are required, the noise consultant shall be required to retain a licensed landscape architect in order to prepare and develop planting details. The final planting details must be in "tender-ready" landscaping drawings, bill of materials and construction specifications for the purposes of incorporating into a stand alone barrier installation or as part of a road construction project.

Complete "tender-ready" landscape drawings, prepared and stamped by a licensed professional, will be required to be submitted with the drawing submission. Landscape may include hardy perennials, shrub and tree planting and where necessary may include planting on private property where existing landscape material will be impacted by the newly installed barrier.

A site visit with a Regional Staff from York Region's Forestry division and shall be conducted prior to preparing the landscape drawings. Call 1-877-464-9675 to arrange a site meeting and tree species selection.

Drawings will be required to be reviewed and signed off prior to approving the installation of any noise attenuation barrier. The approximate value of the landscape works shall be 3 to 5% of the overall cost of the barrier(s).


##### Notes:

1. The colours and frequency of application of the treatment is to be approved by York Region Streetscaping Manager.
2. Decorative Masonry Pillars may be considered. For specific treatment type and application, refer to York Region Streetscaping Manager.
3. Regional Centres will require an enhanced treatment suited to an urban design context.

 **Transportation Services**

**SHEET H**  
**AESTHETIC ENHANCEMENTS**

November 2019  
DATE

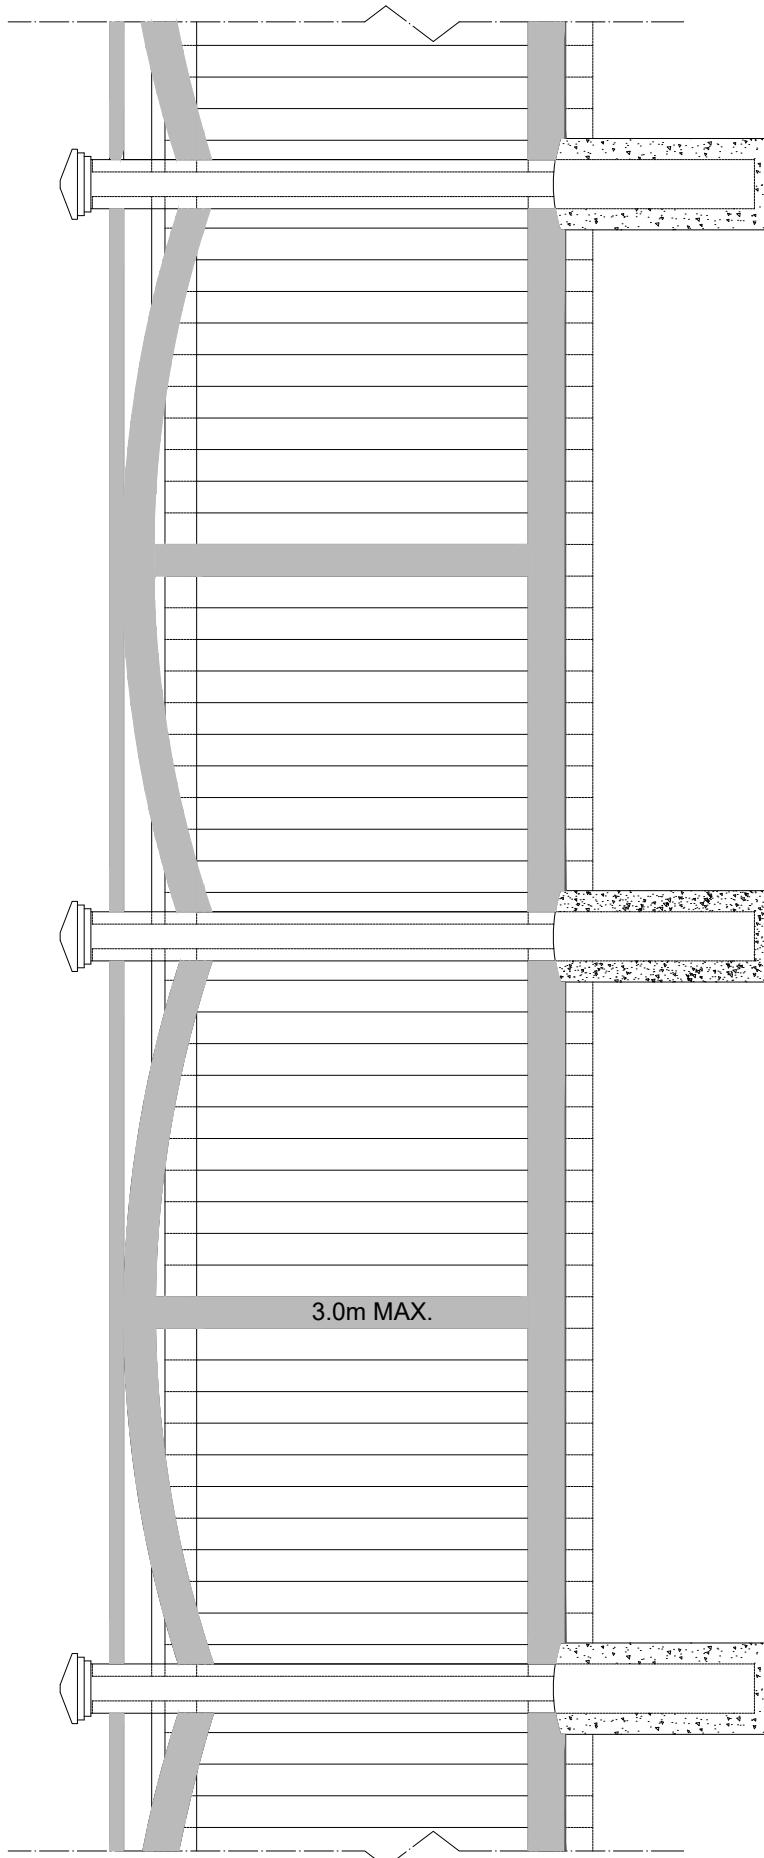


**Transportation Services**  
**York Region**

Notes:

1. Refer to Detail Drawings B1 and B2 for construction details.
2. Colour treatments as approved by York Region.

DETAIL "H 1"  
AESTHETIC TREATMENT  
APPLICATION: AS APPROVED BY YORK REGION

November 2019 \_\_\_\_\_  
DATE

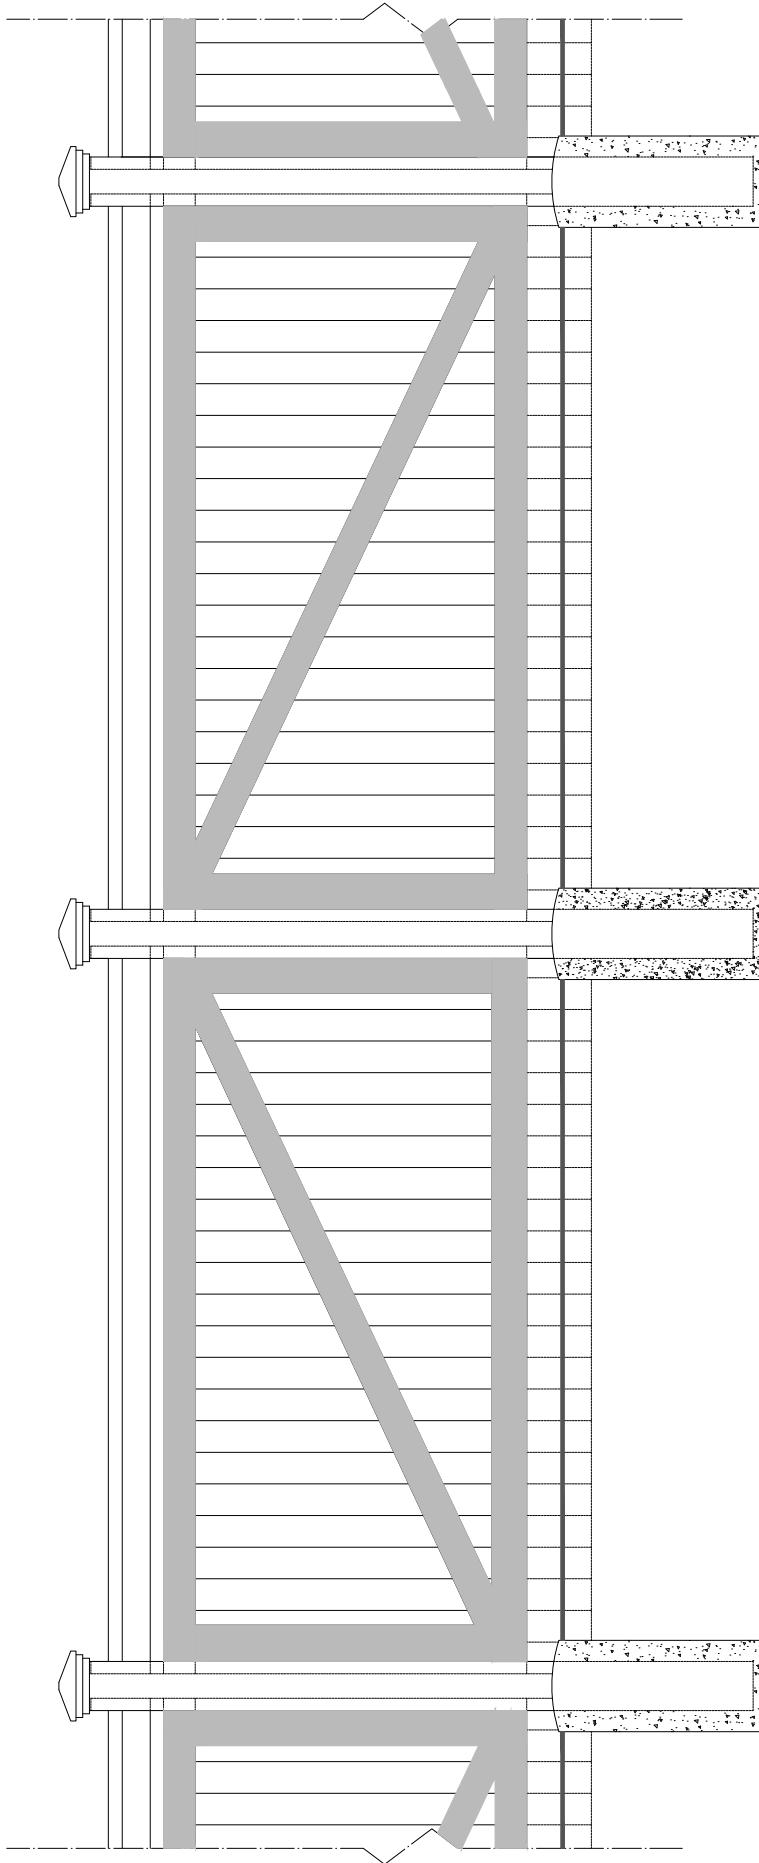

**Transportation Services**




DETAIL "H 2"  
AESTHETIC TREATMENT  
APPLICATION: AS APPROVED BY YORK REGION

Notes:

1. Refer to Detail Drawings B1 and B2 for construction details.
2. Colour treatments as approved by York Region.

November 2019  
\_\_\_\_\_  
DATE

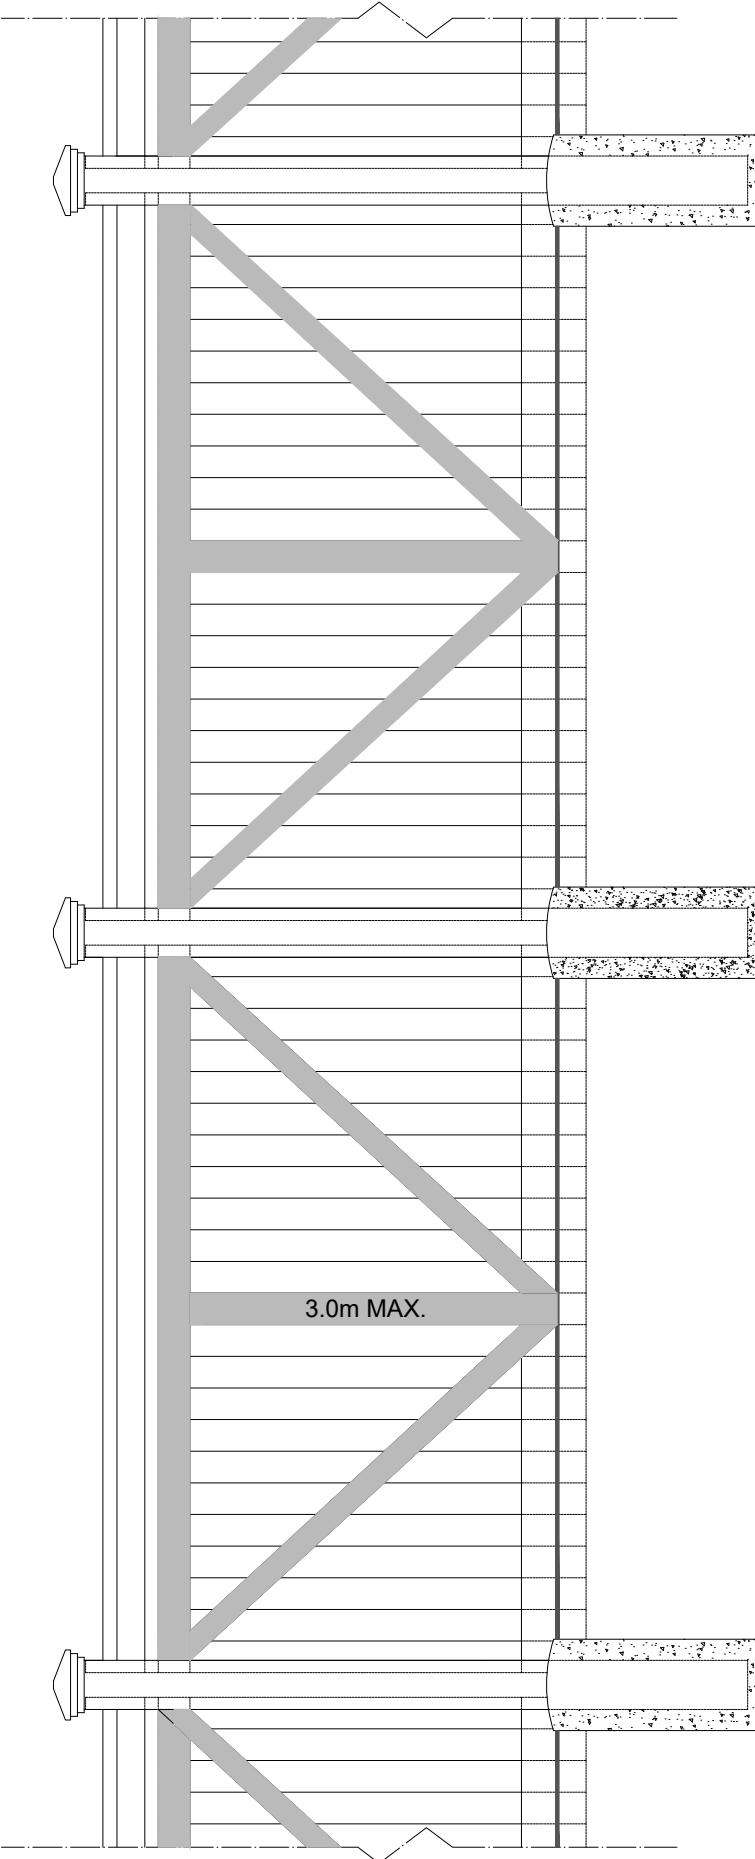

## Transportation Services



### Notes:

1. Refer to Detail Drawings B1 and B2 for construction details.
2. Colour treatments as approved by York Region.

DETAIL "H 3"

AESTHETIC TREATMENT

APPLICATION: AS APPROVED BY YORK REGION

November 2019

DATE