



SOIL TRENCH SPECIFICATIONS SOFTSCAPE BOULEVARDS

1. PLANTING SOIL MIXTURE SHALL CONFORM TO YORK REGION SPECIFICATION FOR PREPARATION AND INSTALLATION OF TREE PLANTING SOIL.
2. SUBGRADE SOIL TO BE TILLED TO A DEPTH OF 25-50mm PRIOR TO INSTALLING PLANTING SOIL.
3. 25-50mm OF PLANTING SOIL SHALL BE PLACED IN THE TRENCH AND TILLED INTO THE SUBGRADE SOIL.
4. REMAINING PLANTING SOIL SHALL BE INSTALLED IN LIFTS OF 150mm-300mm AND COMPACTED BETWEEN 75% AND 80% OF MAXIMUM DRY DENSITY (PROCTOR).
5. TILL 40mm OF ORGANIC MATIER (COMPOST) INTO TOP LAYER OF INSTALLED PLANTING SOIL TO A DEPTH OF 60-90mm.
6. BOULEVARD SOIL TRENCH TO BE FINISHED WITH SOD IN ACCORDANCE WITH OPSS 803.
7. 150mm SUB DRAIN TO "T" OUTLET INTO EXISTING CATCH BASIN IN ACCORDANCE WITH OPSS 405.

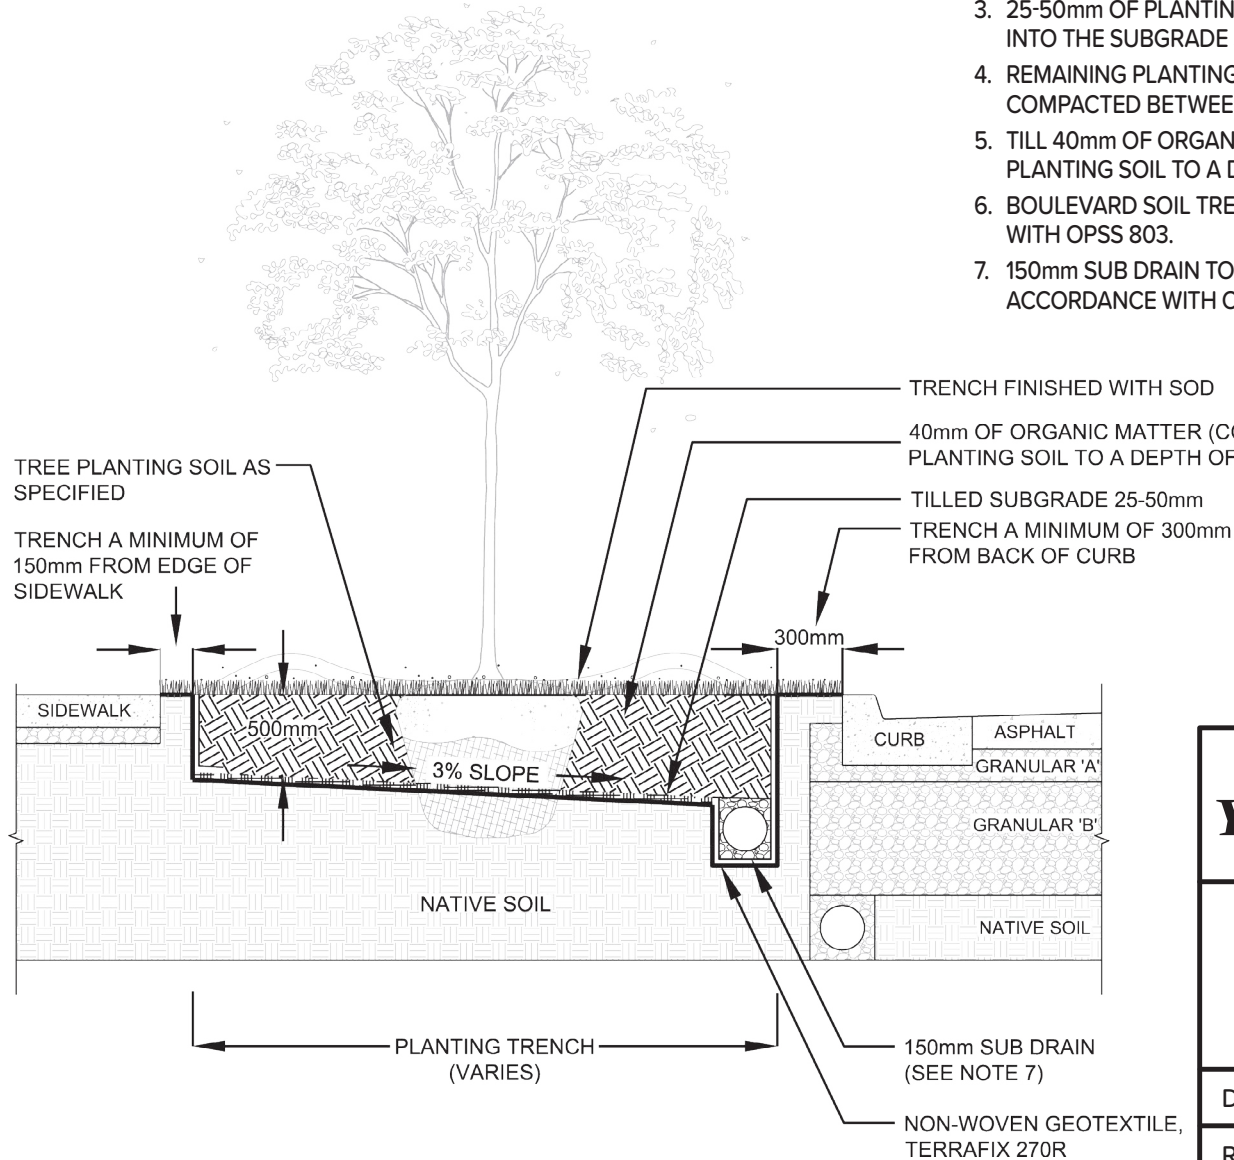

		Environmental Services
BOULEVARD SOIL TRENCH DETAIL FOR TREE PLANTING (NEW CONSTRUCTION)		
DATE: JUNE 2016		SCALE N.T.S.
REV.	X	X
		NHF-200