



DETAIL "A"

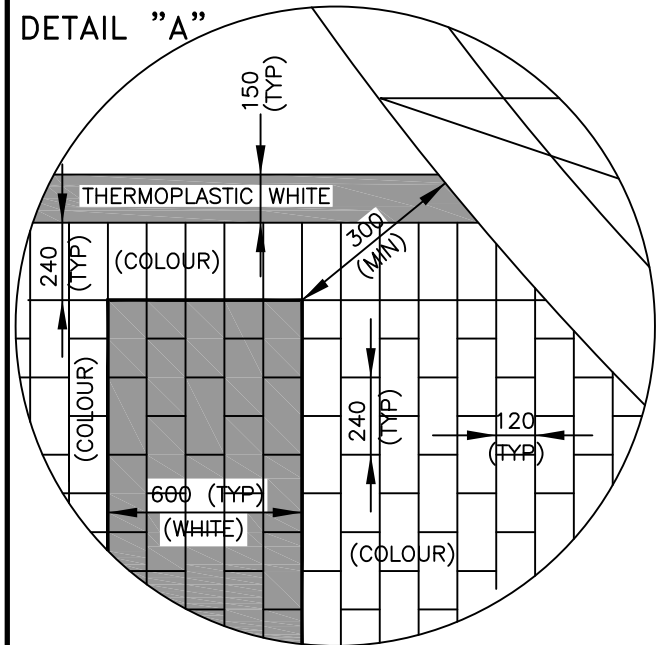

NOTES

1. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE NOTED.
2. SEE STANDARD DRAWING DS-400 FOR PAVEMENT MARKING LEGEND.
3. NO WHITE BAR SHALL BE PLACED WITHIN 300mm OF THE RADIUS.
4. IN PLACE OF "COLONIAL RED", AN ALTERNATE COLOUR MAY BE SUBSTITUTED TO BETTER COORDINATE WITH THE PROPOSED ADJOINING STREETSCAPING WORK BEING DONE. (i.e. "FIELD GRAY", "SONOMA SAND" OR "SANTA FE CLAY")
5. SEE STD. DWG. DS-408 FOR TYPICAL CROSSWALK LAYOUT AT SIGNALIZED INTERSECTIONS.
6. THIS STANDARD IS TO BE USED AS A GUIDE ONLY AND WILL REQUIRE ADJUSTMENTS TO SUIT FIELD CONDITIONS.

		Transportation Services
TYPICAL ZEBRA PAVEMENT MARKING DETAIL AT SIGNALIZED INTERSECTIONS USING "TrafficPatternsXD"		
DATE:	FEBRUARY 2019	SCALE N.T.S.
REV.	X X	DS-409