

- ENSURE PAVERS IN TRAY ARE FLUSH WITH ADJACENT PAVERS
- ALL PAVERS INSIDE THE PAVER TRAY TO BE GLUED ON EDGE WITH CONSTRUCTION ADHESIVE
- GALVANIZED STEEL RECESSED REMOVABLE PAVER TRAY INCLUDING INNER TRAY AND OUTER FRAME
- FOR PAVING, REFER TO PAVING DETAILS
- ATTACH FRAME TO CONCRETE BASE WITH TAPCON SCREWS
- HANDWELL/UTILITY AS PER CIVIL/ELECTRICAL/UTILITIES PACKAGE PAVER TRAY/FRAME
- EXPANSION JOINT FILLER MATERIAL SHALL BE ASPHALT IMPREGNATED FIBREBOARD 12mm MIN. AND SHALL BE ACCORDING TO OPSS 1308, TYPE A.

EMBOSSED PAVER SYMBOL UTILITY LOCATION GRAPHIC



■ TOPSOIL




□ + YTN



⊕ WATER



⊗ ELECTRICAL

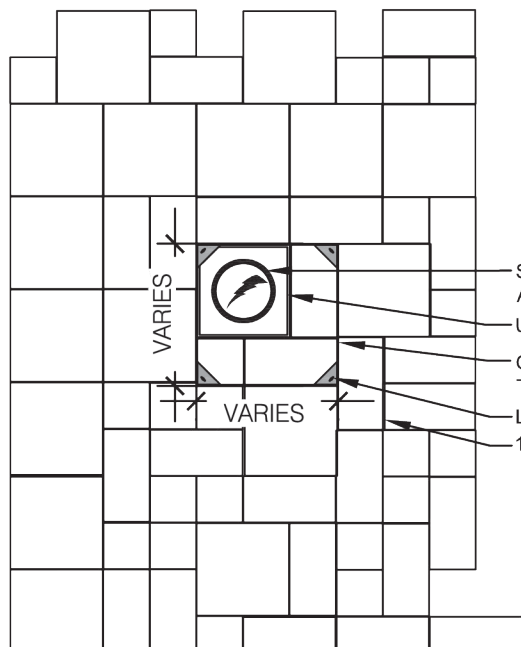

- SAND BLAST UTILITY SYMBOL INTO PAVER STONE PROVIDE SAMPLE FOR APPROVAL
- UNIT PAVER WITH STONE MARKER SIZE: 400x400x70mm
- GALVANIZED STEEL RECESSED REMOVABLE PAVER TRAY INCLUDING INNER TRAY AND OUTER FRAME. CONTRACTOR TO PROVIDE SHOP DRAWINGS.
- LIFTING EYES. CONTRACTOR TO PROVIDE SHOP DRAWINGS.
- 1m x 1m CONCRETE BASE UNDER UNIT PAVING

NOTES

1. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED
2. THIS TREATMENT APPLIES TO ALL MANHOLE, HANDWELL, VC, ELECTRICAL BOXES AND ALL OTHER TYPES OF UTILITIES OR OTHER OBJECTS LOCATED WITHIN THE PROPOSED BLVD ZONE. (EXCLUDE LIGHT POLE CAISSONS)



**Transportation
Services**

UTILITY PAVER TRAY

DATE: MARCH 2017 SCALE N.T.S.

REV. X X **SS-110**