


SPLASH STRIP SECTION

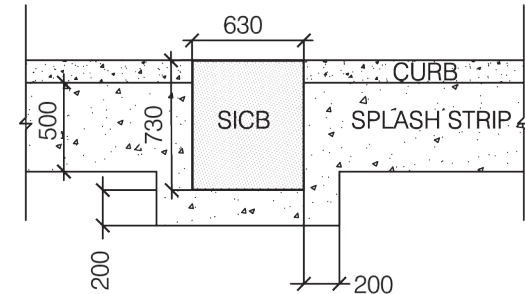

PAVING AT SIDE INLET CATCH BASINS

NOTES:

1. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED
2. CONCRETE TO BE 15 MPa AT 28 DAYS AS PER CSA A23.2-9C
3. CONTROL JOINTS TO BE LOCATED AT MAXIMUM INTERVALS OF 1.5m OC. JOINTS TO BE SAW CUT TO A DEPTH OF 30mm
4. EXPANSION JOINTS TO BE 12mm BITUMINOUS FIBRE BOARD SET AT 12mm BELOW GRADE AND FINISHED WITH CONCRETE COLOUR MATCHED POLYSULPHITE SEALANT FLUSH WITH FINISHED GRADE. LOCATE EXPANSION JOINTS EVERY THIRD JOINT AND WHERE CONCRETE MEETS OTHER HARD SURFACES AND STRUCTURES

<span style="font-size: 1.2em; font-weight: bold; vertical-align: middle;">Transportation Services</span>		
<p><b>PERVIOUS COLOURED CONCRETE SPLASH STRIP FOR CONCRETE BARRIER CURB WITH STANDARD GUTTER BOULEVARDS</b></p>		
DATE:	JANUARY 2020	SCALE N.T.S.
REV.	X    X	SS-105B